



Automation for a Changing World

## **Delta AC Servo System ASDA-A2 Series**



[www.importsnab24.ru](http://www.importsnab24.ru)  
8800-200-29-14

 **DELTA**

# **More Rapid, More Stable, More Precise**

**Delta Electronics, Inc.**, a leading manufacturer of industrial automation products, is pleased to announce the launch of its new high-performance ASDA-A2 series servo motors and servo drives with motion control.

The current trend for motion control has the control command source close to the drive. In response, Delta has developed the new ASDA-A2 series that offers excellent motion control so that the external controller is almost eliminated. ASDA-A2 series features a built-in electronic cam (E-Cam) function which provides an excellent solution for flying shear, rotary cut and synchronized motion applications. The all new position register control PR mode is a unique and significant function that provides a variety of control modes to enhance system performance.

The advanced CANopen interface for high-speed communication enables the drive to integrate with other parts of the automation more efficiently and effectively. The full-closed control, auto notch filter, vibration suppression and gantry control functions help to perform complex motions that require high precision and smooth operation.

The 20-bit superior resolution encoder which is essential for accurate positioning applications is equipped as standard. In addition, the outstanding Capture and Compare functions for high-speed pulses offer the best support for stepless positioning. Other additional functionality, such as up to 1kHz frequency response, innovative editing software, high-speed PC monitoring (similar to a digital oscilloscope), and more, all drastically maximize the performance of the ASDA-A2 series.

**Delta's new ASDA-A2 series is the ultimate servo system providing a total solution for a wide range of machine tools and industrial applications**





## Table of Contents

---


- 3 ASDA-A2 Series Features
  - 9 Product Line-up
  - 14 Model Explanation
  - 15 Servo Motor Features
  - 16 Servo Motor Specifications
  - 22 Servo Motor Dimensions
  - 31 Part Names and Functions
  - 33 Standard Connection Examples
  - 41 ASDA-Soft Configuration Software
  - 43 Optional Accessories
  - 45 Servo Drive Specifications
  - 47 Servo Drive Dimensions
  - 52 Optional Cables and Connectors
  - 59 Servo Drive, Servo Motor and Accessories Combinations
  - 69 Safety Information
  - 70 Regenerative Resistor Specifications
- 



# ASDA-A2 Series Features

## High Positioning Accuracy


- ECMA series servo motors feature incremental encoders with 20-bit resolution (1280000 p/rev) which can eliminate unstable commands at low speed, smooth motor operation and enhance the accuracy of positioning.

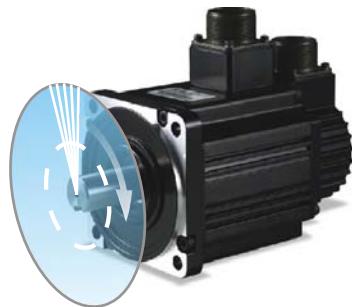

1280000 p/rev(Incremental)

- Absolute encoder supported. 17-bit motor position will not get lost when power is cut off.



## Connection Example of Dual Battery Box

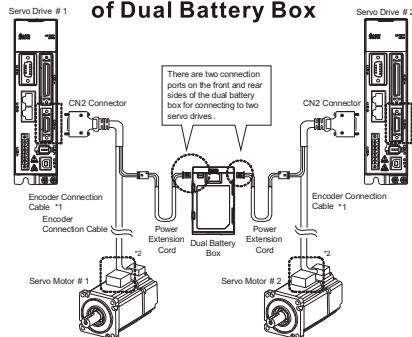

## High Responsiveness

- Up to 1kHz frequency response.
- Settling time below 1ms.
- 7ms acceleration time for speeds from -3000r/min to 3000r/min with an empty load!


(Note: The test record of a 400W motor with 60mm frame size)

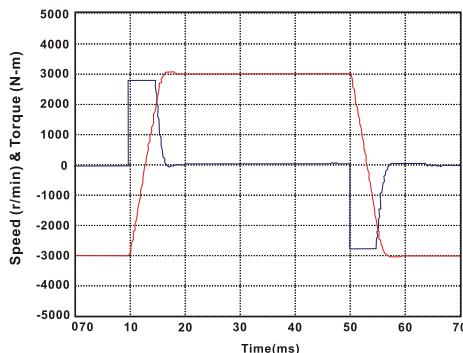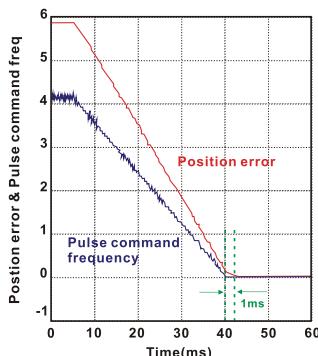

## Excellent Suppression Functions

### ■ Vibration Suppression (Low Frequency)

Two vibration suppression filters are provided for long arm system to minimize the vibration at machine edges effectively.

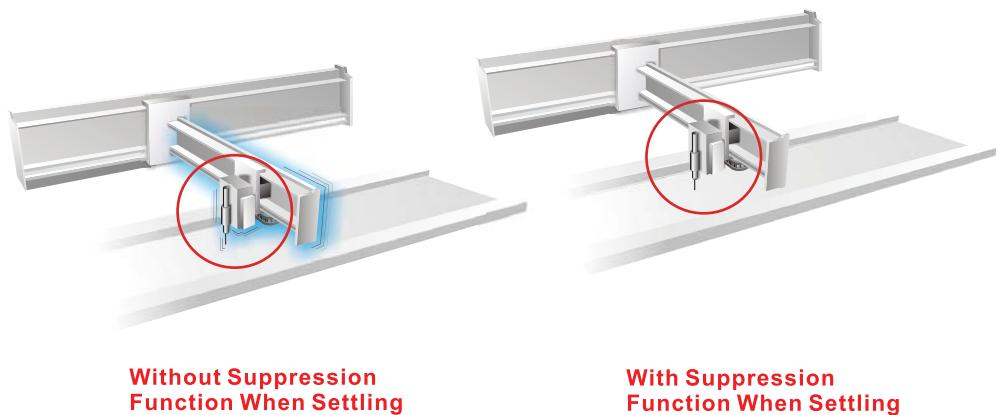


Without Suppression Function When Settling

With Suppression Function When Settling

### ■ Resonance Suppression (High Frequency)


Two auto notch filters and one manual notch filter are provided to suppress mechanical resonance efficiently.

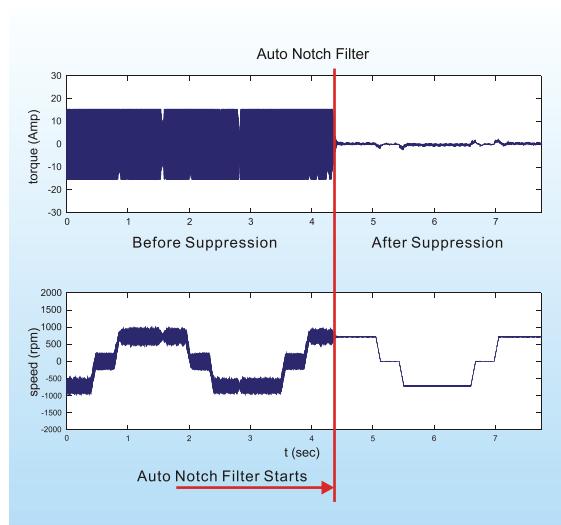

## ASDA-A2 Series Features

### Full-Closed Control Function

- Reduces the effects of backlash and flexibility from the machine and ensures the accuracy of positioning.

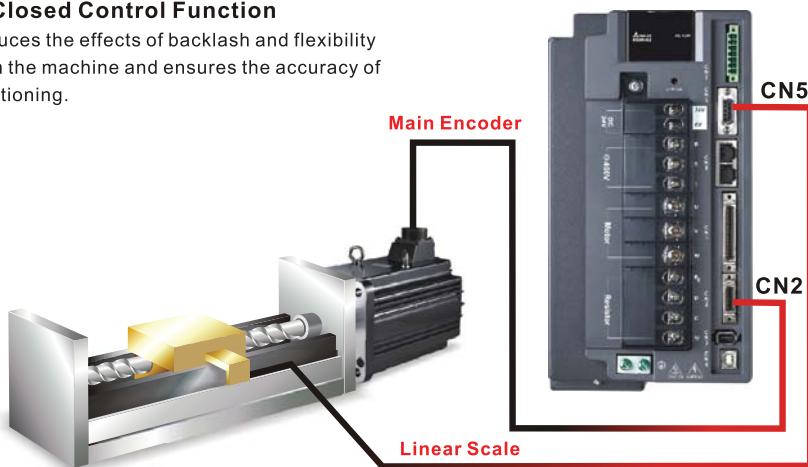


### Electronic Cam (E-Cam) Function

- 720 points max. for E-Cam outline.
- Smooth interpolation between points can be completed automatically to yield a flexible programming.
- ASDA-Soft configuration software supported.
- Easy to use for flying shear, rotary cut, and other cam applications.




## Versatile PR Mode


- ASDA-Soft configuration software supported.
- New sub-modes supported, not traditional point-to-point control.
- 64 procedures can be applied.
- Motion profile can be changed instantaneously.
- 35 Homing modes / Jump mode / Write parameter mode / Constant speed mode / Position control mode supported.

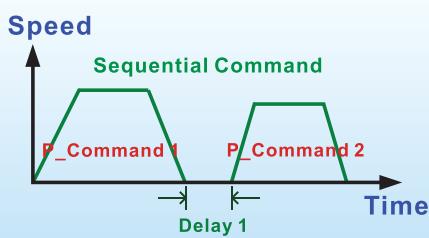

A command is executed only when the previous command is completed.

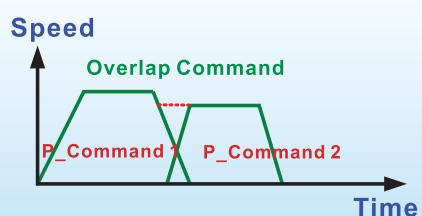

The second command is executed after the delay time or during the deceleration period.

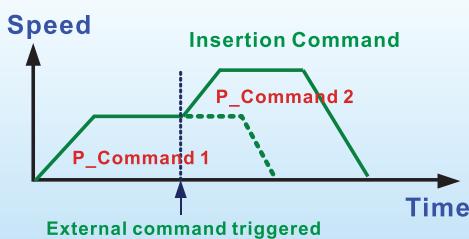

Insertion changes the command executed at the moment it is inserted.



# ASDA-A2 Series Features


## Capture and Compare Functions

### Capture - Position Latch Function


- Latches the coordinate value on the reference axis.
- Response time is less than 5us.
- It can be used to do mark tracing.
- Maximum 800 records

### Compare - Position Detection Function

- Detects the location on the reference axis.
- Response time is less than 5us.
- It can be used for CCD camera applications.
- Maximum 800 records

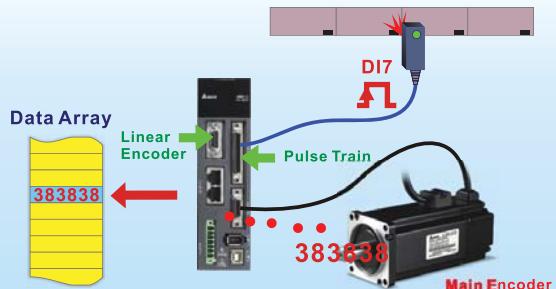

When DI7 is triggered, the latched position is recorded in Data Array.

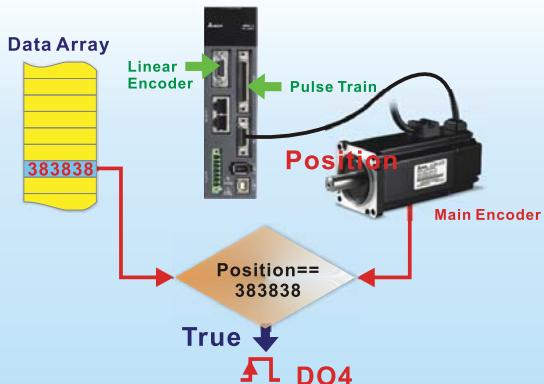

When the record in Data Array is the same as the detected position, DO4 will output.


## Supports CANopen Protocol

- Up to 1Mbps Communication rate.
- Supports DS301 and DS402 standard.
- With the aid of Delta's PLC, it can save on wiring and establish a Delta fieldbus system configuration.
- Capable of reading and writing servo drive parameters in any mode through CANopen communication.

## Delta High-speed Communication Network



## Integrated Gantry Control

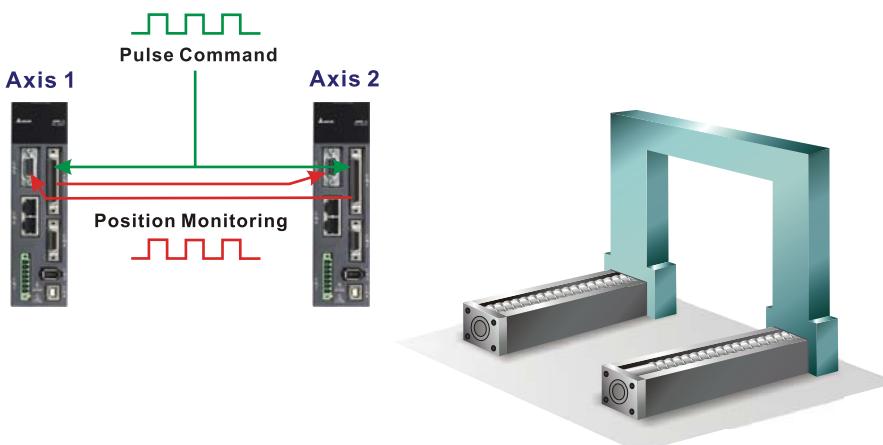

## Product Line-up

### 220V Series

Servo Drives	100W	0.2kW	0.4kW	0.75kW	1.0kW	1.5kW	2kW	3kW
	ASD-A2-0121-□	ASD-A2-0221-□	ASD-A2-0421-□	ASD-A2-0721-□	ASD-A2-1021-□	ASD-A2-1521-□	ASD-A2-2023-□	ASD-A2-3023-□

Servo Motors	ECMA-C10401□S	ECMA-C10602□S	ECMA-C10604□S	ECMA-C10807□S	ECMA-C11010□S	ECMA-E11315□S	ECMA-C11020□S	ECMA-E11830□S
	ECMA-C10804□7			ECMA-G11306□S	ECMA-E11310□S		ECMA-E11320□S	ECMA-F11830□S
	ECMA-E11305□S		ECMA-G11303□S	ECMA-C10907□S	ECMA-G11309□S	ECMA-C10910□S	ECMA-E11820□S	

		
4.5kW	5.5kW	7.5kW
ASD-A2-4523-□	ASD-A2-5523-□	ASD-A2-7523-□

		
ECMA-F11845□S	ECMA-F11855□3	ECMA-F11875□3

1. The boxes (□) at the ends of the servo drive model names are for optional configurations.

For the actual model name, please refer to the model explanation of the servo drive.

2. The boxes (□) in the servo motor model names are for optional configurations (keyway, brake and oil seal).

# Product Line-up

## 220V Series

Servo Drives		
	11kW	15kW
	ASD-A2-1B23-□	ASD-A2-1F23-□

Servo Motors		
	ECMA-F1221B□3	ECMA-F1221F□S

1. The boxes (□) at the ends of the servo drive model names are for optional configurations.  
For the actual model name, please refer to the model explanation of the servo drive.

2. The boxes (□) in the servo motor model names are for optional configurations (keyway, brake and oil seal).

# Product Line-up

## 400V Series

Servo Drives							
	750W	1000W	1500W	2000W	3000W	4500W	5500W
	ASD-A2-0743-□	ASD-A2-1043-□	ASD-A2-1543-□	ASD-A2-2043-□	ASD-A2-3043-□	ASD-A2-4543-□	ASD-A2-5543-□

Servo Motors							
	ECMA-J10807□S	ECMA-K11310□S	ECMA-K11315□S	ECMA-K11320□S	ECMA-L11830□S	ECMA-L11845□S	ECMA-L11855□S

1. The boxes (□) at the ends of the servo drive model names are for optional configurations.

For the actual model name, please refer to the model explanation of the servo drive.

2. The boxes (□) in the servo motor model names are for optional configurations (keyway, brake and oil seal).

# Product Line-up

## 400V Series

Servo Drives			
	7.5kW	11kW	15kW
	ASD-A2-7543-□	ASD-A2-1B43-□	ASD-A2-1F43-□

Servo Motors			
	ECMA-L11875□3	ECMA-L1221B□3	ECMA-L1221F□S


1. The boxes (□) at the ends of the servo drive model names are for optional configurations.

For the actual model name, please refer to the model explanation of the servo drive.

2. The boxes (□) in the servo motor model names are for optional configurations (keyway, brake and oil seal).

# Model Explanation

## ASDA-A2 Series Servo Drives

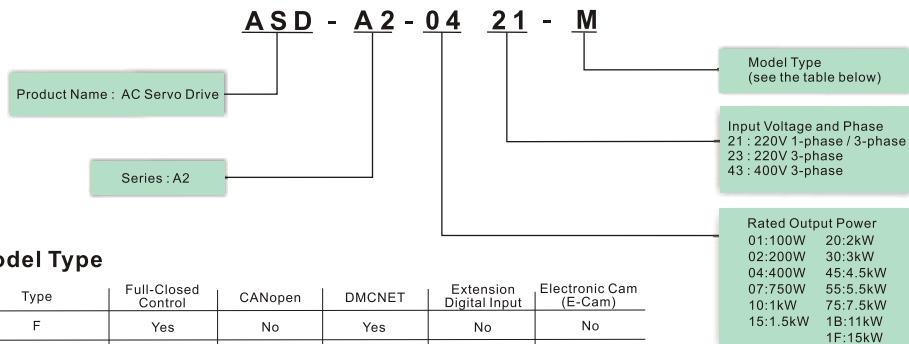

### Model Type

Type	Full-Closed Control	CANopen	DMCNET	Extension Digital Input	Electronic Cam (E-Cam)
F	Yes	No	Yes	No	No
M	Yes	Yes	No	No	Yes
U	Yes	No	No	Yes	Yes
L	Yes	No	No	No	No


F: For DMCNET

M: Support CANopen

U: Without CANopen

L: Without E-Cam

## ECMA Series Servo Motors

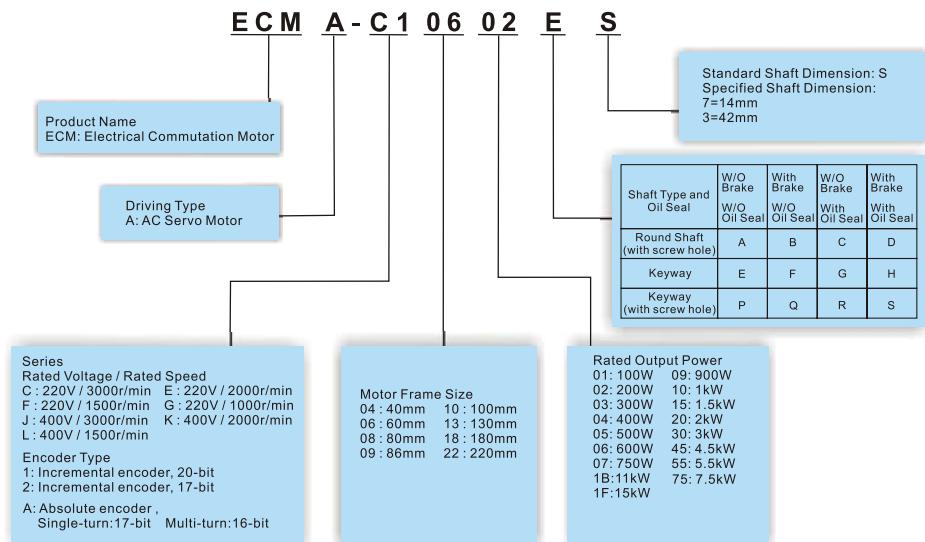

## Servo Motor Features

**ECMA** series servo motors are permanent AC servo motors, capable of combining with 200 to 230V ASDA-A2 220V series AC servo drives from 100W to 15kW and 380V to 480V ASDA-A2 400V series AC servo drives from 750W to 15kW.

For the 220V series, there are 40mm, 60mm, 80mm, 86mm, 100mm, 130mm, 180mm and 220mm eight kinds of frame sizes available. The motor speed is from 1000 r/min to 5000 r/min and the torque output is from 1.92 N·m to 224 N·m.

For the 400V series, there are 80mm, 130mm, 180mm and 220mm three kinds of frame sizes available. The motor speed is from 1500 r/min to 5000 r/min and the torque output is from 2.39 N·m to 224 N·m. In terms of optional configurations, ECMA series provides brake and oil seal to fully support our customers' needs. It also offers two different shaft selections, round shaft and keyway, for various applications.



# Servo Motor Specifications

## - Low Inertia Series (Incremental)

### 220V Series

ECMA Series	C104	C106		C108		C109		C110						
	01	02	04	04	07	07	10	10	20					
Rated output power (kW)	0.1	0.2	0.4	0.4	0.75	0.75	1.0	1.0	2.0					
Rated torque (N·m) <sup>1</sup>	0.32	0.64	1.27	1.27	2.39	2.39	3.18	3.18	6.37					
Maximum torque (N·m)	0.96	1.92	3.82	3.82	7.16	7.14	8.78	9.54	19.11					
Rated speed (r/min)			3000			3000		3000						
Maximum speed (r/min)			5000			3000		5000						
Rated current (A)	0.90	1.55	2.6	2.6	5.1	3.66	4.25	7.3	12.05					
Maximum current (A)	2.70	4.65	7.8	7.24	15.3	11	12.37	21.9	36.15					
Power rating (kW/s)	27.7	22.4	57.6	22.1	48.4	29.6	38.6	38.1	90.6					
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ )	0.037	0.177	0.277	0.68	1.13	1.93	2.62	2.65	4.45					
Mechanical time constant (ms)	0.75	0.80	0.53	0.73	0.62	1.72	1.20	0.74	0.61					
Torque constant-KT (N·m/A)	0.36	0.41	0.49	0.49	0.47	0.65	0.75	0.44	0.53					
Voltage constant-KE(mV/(r/min))	13.6	16	17.4	18.5	17.2	27.5	24.2	16.8	19.2					
Armature resistance (Ohm)	9.30	2.79	1.55	0.93	0.42	1.34	0.897	0.20	0.13					
Armature inductance (mH)	24.0	12.07	6.71	7.39	3.53	7.55	5.7	1.81	1.50					
Electrical time constant (ms)	2.58	4.3	4.3	7.96	8.36	5.66	6.35	9.3	11.4					
Insulation class					Class A (UL), Class B (CE)									
Insulation resistance					100MΩ , DC 500V									
Insulation strength					AC 1500 V, 60 seconds									
Weight (kg) (without brake)	0.5	1.2	1.6	2.1	3.0	2.9	3.8	4.3	6.2					
Weight (kg) (with brake)	0.8	1.5	2.0	2.9	3.8	3.69	5.5	4.7	7.2					
Max. radial shaft load (N)	78.4	196	196	245	245	245	245	490	490					
Max. thrust shaft load (N)	39.2	68	68	98	98	98	98	98	98					
Power rating (kW/s) (with brake)	25.6	21.3	53.8	22.1	48.4	29.3	37.9	30.4	82					
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (with brake)	0.04	0.192	0.30	0.73	1.18	1.95	2.67	3.33	4.95					
Mechanical time constant (ms) (with brake)	0.81	0.85	0.57	0.78	0.65	1.74	1.22	0.93	0.66					
Brake holding torque [N·m (min)]	0.3	1.3	1.3	2.5	2.5	2.5	2.5	8	8					
Brake power consumption (at 20°C) [W]	7.2	6.5	6.5	8.2	8.2	8.2	8.2	18.5	18.5					
Brake release time [ms (Max)]	5	10	10	10	10	10	10	10	10					
Brake pull-in time [ms (Max)]	25	70	70	70	70	70	70	70	70					
Vibration grade (μm)					15									
Operating temperature (°C)					0°C to 40°C (32°F to 104°F)									
Storage temperature (°C)					-10°C to 80°C (-14°F to 176°F)									
Operating humidity					20 to 90%RH (non-condensing)									
Storage humidity					20 to 90%RH (non-condensing)									
Vibration capacity					2.5G									
IP Rating		IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))												
Approvals		 												

Footnote:

\*1 Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA\_-04 / 06 / 08 : 250mm x 250mm x 6mm

ECMA\_-10 : 300mm x 300mm x 12mm

ECMA\_-13 : 400mm x 400mm x 20mm

ECMA\_-18 : 550mm x 550mm x 30mm

Material type : Aluminum F40, F60, F80, F100, F130, F180

# Servo Motor Specifications

## - Medium / High Inertia Series (Incremental)

### 220V Series

Model: ECMA Series	E113			
	05	10	15	20
Rated output power (kW)	0.5	1.0	1.5	2.0
Rated torque (N·m) <sup>*1</sup>	2.39	4.77	7.16	9.55
Maximum torque (N·m)	7.16	14.32	21.48	28.65
Rated speed (r/min)		2000		
Maximum speed (r/min)		3000		
Rated current (A)	2.9	5.6	8.3	11.01
Maximum current (A)	8.7	16.8	24.81	33
Power rating (kW/s)	7.0	27.1	45.9	62.5
Rotor moment of inertia (x10 <sup>-4</sup> kg·m <sup>2</sup> ) (without brake)	8.17	8.41	11.18	14.59
Mechanical time constant (ms)	1.91	1.51	1.11	0.96
Torque constant-KT (N·m/A)	0.83	0.85	0.87	0.87
Voltage constant-KE (mV/(r/min))	30.9	31.9	31.8	31.8
Armature resistance (Ohm)	0.57	0.47	0.26	0.174
Armature inductance (mH)	7.39	5.99	4.01	2.76
Electrical time constant (ms)	12.96	12.88	15.31	15.86
Insulation class	Class A (UL), Class B (CE)			
Insulation resistance	100MΩ , DC 500V			
Insulation strength	AC 1500 V, 60 seconds			
Weight (kg) (without brake)	6.8	7	7.5	7.8
Weight (kg) (with brake)	8.2	8.4	8.9	9.2
Max. radial shaft load (N)	490	490	490	490
Max. thrust shaft load (N)	98	98	98	98
Power rating (kW/s) (with brake)	6.4	24.9	43.1	59.7
Rotor moment of inertia (x10 <sup>-4</sup> kg·m <sup>2</sup> ) (with brake)	8.94	9.14	11.90	15.88
Mechanical time constant (ms) (with brake)	2.07	1.64	1.19	1.05
Brake holding torque [Nt·m (min)]	10.0	10.0	10.0	10.0
Brake power consumption (at 20°C) [W]	19.0	19.0	19.0	19.0
Brake release time [ms (Max)]	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70
Vibration grade ( μ m )	15			
Operating temperature ( °C )	0°C to 40°C (32°F to 104°F)			
Storage temperature ( °C )	-10°C to 80°C (-14°F to 176°F)			
Operating humidity	20 to 90%RH (non-condensing)			
Storage humidity	20 to 90%RH (non-condensing)			
Vibration capacity	2.5G			
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))			
Approvals	 			

Footnote:

<sup>\*1</sup> Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA—04 : 06/08 : 250mm x 250mm x 6mm

ECMA—10 : 300mm x 300mm x 12mm

ECMA—13 : 400mm x 400mm x 20mm

ECMA—18 : 550mm x 550mm x 30mm

Material type : Aluminum F40, F60, F80, F100, F130, F180

# Servo Motor Specifications

## - Medium / High Inertia Series (Incremental)

### 220V Series

Model: ECMA Series	E118		G113		
	20	30	03	06	09
Rated output power (kW)	2.0	3.0	0.3	0.6	0.9
Rated torque (N·m) <sup>1</sup>	9.55	14.32	2.86	5.73	8.59
Maximum torque (N·m)	28.65	42.97	8.59	17.19	21.48
Rated speed (r/min)	2000		1000		
Maximum speed (r/min)	3000		2000		
Rated current (A)	11.22	16.1	2.5	4.8	7.5
Maximum current (A)	33.66	48.3	7.44	14.49	22.5
Power rating (kW/s)	26.3	37.3	10.0	39.0	66.0
Rotor moment of inertia ( $\times 10^{-3}$ kg·m $^2$ ) (without brake)	34.68	54.95	8.17	8.41	11.18
Mechanical time constant (ms)	1.62	1.06	1.84	1.40	1.07
Torque constant-KT (N·m/A)	0.85	0.89	1.15	1.19	1.15
Voltage constant-KE (mV/(r/min))	31.4	32	42.5	43.8	41.6
Armature resistance (Ohm)	0.119	0.052	1.06	0.82	0.43
Armature inductance (mH)	2.84	1.38	14.29	11.12	6.97
Electrical time constant (ms)	23.87	26.39	13.55	13.55	16.06
Insulation class	Class A (UL), Class B (CE)				
Insulation resistance	100MΩ , DC 500V				
Insulation strength	AC 1500 V, 60 seconds				
Weight (kg) (without brake)	13.5	18.5	6.8	7	7.5
Weight (kg) (with brake)	17.5	22.5	8.2	8.4	8.9
Max. radial shaft load (N)	1176	1470	490	490	490
Max. thrust shaft load (N)	490	490	98	98	98
Power rating (kW/s) (with brake)	24.1	35.9	9.2	35.9	62.1
Rotor moment of inertia ( $\times 10^{-3}$ kg·m $^2$ ) (with brake)	37.86	57.06	8.94	9.14	11.9
Mechanical time constant (ms) (with brake)	1.77	1.10	2.0	1.51	1.13
Brake holding torque [N·m (min)]	25.0	25.0	10.0	10.0	10.0
Brake power consumption (at 20°C) [W]	20.4	20.4	19.0	19.0	19.0
Brake release time [ms (Max)]	10	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70	70
Vibration grade ( μ m )	15				
Operating temperature ( °C )	0°C to 40°C (32°F to 104°F)				
Storage temperature ( °C )	-10°C to 80°C (-14°F to 176°F)				
Operating humidity	20 to 90%RH (non-condensing)				
Storage humidity	20 to 90%RH (non-condensing)				
Vibration capacity	2.5G				
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))				
Approvals	 				

Footnote:

<sup>1</sup>Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA-04 : 061x08 - 250mm x 250mm x 6mm

ECMA-10 : 300mm x 300mm x 12mm

ECMA-13 : 400mm x 400mm x 20mm

ECMA-18 : 550mm x 550mm x 30mm

Material type : Aluminum F40, F60, F80, F100, F130, F180

# Servo Motor Specifications

## - Medium / Medium-High Inertia Series (Incremental)

### 220V Series

Model: ECMA Series	F118				F122	
	30	45	55	75	1B	1F
Rated output power (kW)	3.0	4.5	5.5	7.5	11	15
Rated torque (N·m) <sup>1</sup>	19.10	28.65	35.01	47.74	70	95.4
Maximum torque (N·m)	57.29	71.62	87.53	119.36	175	224.0
Rated speed (r/min)				1500		
Maximum speed (r/min)			3000			2000
Rated current (A)	19.4	32.5	40.0	47.5	51.8	61.5
Maximum current (A)	58.2	81.3	100.0	118.8	129.5	145.7
Power rating (kW/s)	66.4	105.5	122.9	159.7	148.9	164.6
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (without brake)	54.95	77.75	99.78	142.7	329	553
Mechanical time constant (ms)	1.28	0.92	0.96	0.63	1.36	1.23
Torque constant-KT (N·m/A)	0.98	0.88	0.88	1.01	1.35	1.55
Voltage constant-KE (mV/(r/min))	35.0	32.0	31.0	35.5	49	55.65
Armature resistance (Ohm)	0.077	0.032	0.025	0.015	0.026	0.018
Armature inductance (mH)	1.27	0.89	0.60	0.40	0.64	0.45
Electrical time constant (ms)	16.5	27.8	24.0	26.7	24.77	24.51
Insulation class				Class A (UL), Class B (CE)		
Insulation resistance				100MΩ , DC 500V		
Insulation strength				AC 1500 V, 60 seconds		
Weight (kg) (without brake)	18.5	23.5	30.5	37.0	56.4	86.4
Weight (kg) (with brake)	22.5	29	36	46	-	-
Max. radial shaft load (N)	1470	1470	1764	1764	3300	3300
Max. thrust shaft load (N)	490	490	588	588	1100	1100
Power rating (kW/s) (with brake)	63.9	101.8	119.4	156.6	-	-
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (with brake)	57.06	80.65	102.70	145.55	-	-
Mechanical time constant (ms) (with brake)	1.33	0.96	0.99	0.64	-	-
Brake holding torque [N·m (min)]	25.0	25.0	25.0	25.0	115	115
Brake power consumption (at 20°C) [W]	20.4	20.4	20.4	20.4	28.8	28.8
Brake release time [ms (Max)]	10	10	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70	70	70
Vibration grade (μm)				15		
Operating temperature (°C)				0°C to 40°C (32°F to 104°F)		
Storage temperature (°C)				-10°C to 80°C (-14°F to 176°F)		
Operating humidity				20 to 90%RH (non-condensing)		
Storage humidity				20 to 90%RH (non-condensing)		
Vibration capacity				2.5G		
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))					
Approvals	 					

Footnote:

<sup>1</sup>Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA—04 : 06/08 : 250mm x 250mm x 6mm

ECMA—10 : 300mm x 300mm x 12mm

ECMA—13 : 400mm x 400mm x 20mm

ECMA—18 : 550mm x 550mm x 30mm

Material type : Aluminum F40, F60, F80, F100, F130, F180

# Servo Motor Specifications

## - Medium / Low Inertia Series (Incremental)

### 400V Series

Model: ECMA Series	J108				K113			
	07	10	15	20				
Rated output power (kW)	0.75	1.0	1.5	2.0				
Rated torque (N·m) <sup>1</sup>	2.39	4.77	7.16	9.55				
Maximum torque (N·m)	7.16	14.32	21.48	28.65				
Rated speed (r/min)	3000		2000					
Maximum speed (r/min)	5000		3000					
Rated current (A)	3.07	3.52	5.02	6.66				
Maximum current (A)	9.5	10.56	15.06	19.98				
Power rating (kW/s)	50.4	27.1	45.9	62.5				
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (without brake)	1.13	8.41	11.18	14.59				
Mechanical time constant (ms)	0.66	1.80	1.24	1.04				
Torque constant-KT (N·m/A)	0.78	1.35	1.43	1.43				
Voltage constant-KE (mV/(r/min))	28.24	53.2	55	55				
Armature resistance (Ohm)	1.22	1.47	0.83	0.57				
Armature inductance (mH)	10.68	17.79	11.67	8.29				
Electrical time constant (ms)	8.75	12.04	14.04	14.39				
Insulation class		---						
Insulation resistance		100MΩ , DC 500V						
Insulation strength		AC 1800 V, 60 seconds						
Weight (kg) (without brake)	3.0	7.0	7.5	7.8				
Weight (kg) (with brake)	3.8	8.4	8.9	9.2				
Max. radial shaft load (N)	245	490	490	490				
Max. thrust shaft load (N)	98	98	98	98				
Power rating (kW/s) (with brake)	48.4	24.9	43.1	59.7				
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (with brake)	1.18	9.14	11.90	15.88				
Mechanical time constant (ms) (with brake)	0.65	1.96	1.32	1.13				
Brake holding torque [Nt·m (min)]	2.5	10.0	10.0	10.0				
Brake power consumption (at 20°C) [W]	8.5	19.0	19.0	19.0				
Brake release time [ms (Max)]	10	10	10	10				
Brake pull-in time [ms (Max)]	70	70	70	70				
Vibration grade ( μm )		15						
Operating temperature ( °C )		0°C to 40°C (32°F to 104°F)						
Storage temperature ( °C )		-10°C to 80°C (-4°F to 176°F)						
Operating humidity		20 to 90%RH (non-condensing)						
Storage humidity		20 to 90%RH (non-condensing)						
Vibration capacity		2.5G						
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))							
Approvals	 <small>CE Mark Safety Approved</small>  <small>UL US</small>							

Footnote:

\*1 Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA-08 : 250mm x 250mm x 6mm

ECMA-13 : 400mm x 400mm x 20mm

ECMA-18 : 550mm x 550mm x 30mm

Material type : Aluminum F80, F130, F180

# Servo Motor Specifications

## - Medium / High Inertia Series (Incremental)

### 400V Series

Model: ECMA Series	L118				L122	
	30	45	55	75	1B	1F
Rated output power (kW)	3.0	4.5	5.5	7.5	11	15
Rated torque (N·m) <sup>1</sup>	19.10	28.65	35.01	47.74	70	95.4
Maximum torque (N·m)	57.29	71.62	87.53	119.36	175	224.0
Rated speed (r/min)				1500		
Maximum speed (r/min)			3000		2000	
Rated current (A)	11.53	20.8	22.37	27.3	30.9	36.7
Maximum current (A)	34.6	52	56	68.3	77.25	86.17
Power rating (kW/s)	66.4	105.5	122.9	159.7	148.9	164.6
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (without brake)	54.95	77.75	99.78	142.7	329	553
Mechanical time constant (ms)	1.11	0.94	0.88	0.77	1.29	1.06
Torque constant-KT (N·m/A)	1.66	1.38	1.56	1.75	2.27	2.6
Voltage constant-KE (mV/(r/min))	64.4	53	58.9	66.4	87	97
Armature resistance (Ohm)	0.21	0.09	0.07	0.06	0.073	0.046
Armature inductance (mH)	4.94	2.36	2.2	1.7	1.87	1.34
Electrical time constant (ms)	23.97	28.07	27.6	28.29	25.34	29.13
Insulation class		----			Class A (UL), Class B (CE)	
Insulation resistance			100MΩ , DC 500V			
Insulation strength			AC 1800 V, 50Hz, 60 seconds		AC 1500 V, 50Hz, 60 seconds	
Weight (kg) (without brake)	18.5	23.5	30.5	37.0	56.4	86.4
Weight (kg) (with brake)	22.5	29	36	46	-	-
Max. radial shaft load (N)	1470	1470	1764	1764	3300	3300
Max. thrust shaft load (N)	490	490	588	588	1100	1100
Power rating (kW/s) (with brake)	63.9	101.8	119.4	156.6	-	-
Rotor moment of inertia ( $\times 10^{-4}$ kg·m $^2$ ) (with brake)	57.06	80.65	102.70	145.55	-	-
Mechanical time constant (ms) (with brake)	1.33	0.96	0.99	0.64	-	-
Brake holding torque [Nt·m (min)]	25.0	25.0	25.0	25.0	115	115
Brake power consumption (at 20°C) [W]	20.4	20.4	20.4	20.4	28.8	28.8
Brake release time [ms (Max)]	10	10	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70	70	70
Vibration grade ( μ m )				15		
Operating temperature ( °C )			0°C to 40°C (32°F to 104°F)			
Storage temperature ( °C )			-10°C to 80°C (-4°F to 176°F)			
Operating humidity			20 to 90%RH (non-condensing)			
Storage humidity			20 to 90%RH (non-condensing)			
Vibration capacity			2.5G			
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))					
Approvals	 				In the process of application to CE and UL certifications.	

Footnote:

<sup>1</sup> Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA-04 : 06/08 - 250mm x 250mm x 6mm

ECMA-10 : 300mm x 300mm x 12mm

ECMA-13 : 400mm x 400mm x 20mm


ECMA-18 : 550mm x 550mm x 30mm

Material type : Aluminum F40, F60, F80, F100, F130, F180

# Servo Motor Dimensions

## 220V Series

Frame Size 86mm and below (Units: mm)

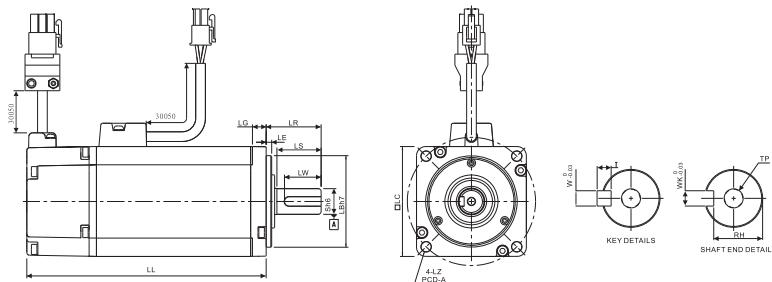

Model	C10401□S	C10602□S	C10604□S	C10804□7	C10807□S	C10907□S	C10910□S
LC	40	60	60	80	80	86	86
LZ	4.5	5.5	5.5	6.6	6.6	6.6	6.6
LA	46	70	70	90	90	100	100
S	8( <sup>+0.009</sup> <sub>-0.009</sub> )	14( <sup>+0.011</sup> <sub>-0.011</sub> )	14( <sup>+0.011</sup> <sub>-0.011</sub> )	14( <sup>+0.011</sup> <sub>-0.011</sub> )	19( <sup>+0.013</sup> <sub>-0.013</sub> )	16( <sup>+0.011</sup> <sub>-0.011</sub> )	16( <sup>+0.011</sup> <sub>-0.011</sub> )
LB	30( <sup>+0</sup> <sub>-0.021</sub> )	50( <sup>+0</sup> <sub>-0.025</sub> )	50( <sup>+0</sup> <sub>-0.025</sub> )	70( <sup>+0.030</sup> <sub>-0.030</sub> )	70( <sup>+0.030</sup> <sub>-0.030</sub> )	80( <sup>+0</sup> <sub>-0.030</sub> )	80( <sup>+0</sup> <sub>-0.030</sub> )
LL (W/O Brake)	100.6	105.5	130.7	112.3	138.3	130.2	153.2
LL (With Brake)	136.6	141.6	166.8	152.8	178	161.3	184.3
LS (W/O Oil Seal)	20	27	27	27	32	30	30
LS (With Oil Seal)	20	24	24	24.5	29.5	30	30
LR	25	30	30	30	35	35	35
LE	2.5	3	3	3	3	3	3
LG	5	7.5	7.5	8	8	8	8
LW	16	20	20	20	25	20	20
RH	6.2	11	11	11	15.5	13	13
WK	3	5	5	5	6	5	5
W	3	5	5	5	6	5	5
T	M3	M4	M4	M4	M6	M5	M5
TP	Depth 8	Depth 15	Depth 15	Depth 15	Depth 20	Depth 15	Depth 15




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

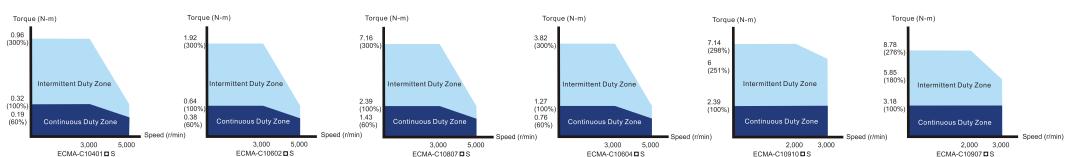

# Servo Motor Dimensions

## 220V Series

Frame Size 100mm and 130mm (Units: mm)

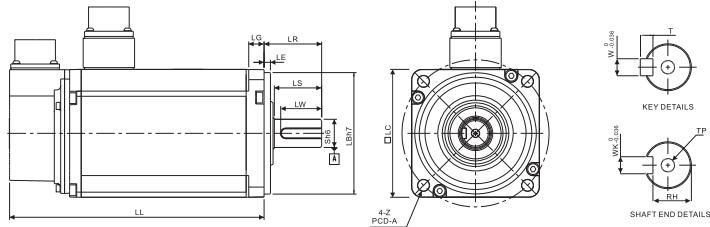

Model	G11303□S	E11305□S	G11306□S	G11309□S	C11010□S
LC	130	130	130	130	100
LZ	9	9	9	9	9
LA	145	145	145	145	115
S	22( +0.013 )	22( +0.013 )	22( +0.013 )	22( +0.013 )	22( +0.013 )
LB	110( +0.035 )	110( +0.035 )	110( +0.035 )	110( +0.035 )	95( +0.035 )
LL (W/O Brake)	147.5	147.5	147.5	163.5	153.3
LL (With Brake)	183.5	183.5	183.5	198	192.5
LS	47	47	47	47	37
LR	55	55	55	55	45
LE	6	6	6	6	5
LG	11.5	11.5	11.5	11.5	12
LW	36	36	36	36	32
RH	18	18	18	18	18
WK	8	8	8	8	8
W	8	8	8	8	8
T	7	7	7	7	7
TP	M6 Depth 20				




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

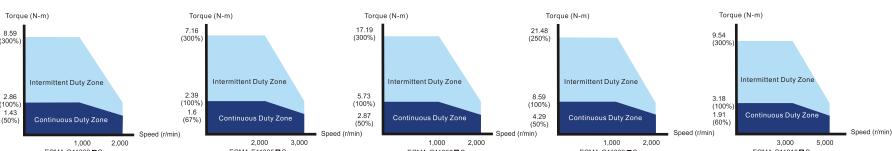

# Servo Motor Dimensions

## 220V Series

Frame Size 100mm and 130mm (Units: mm)

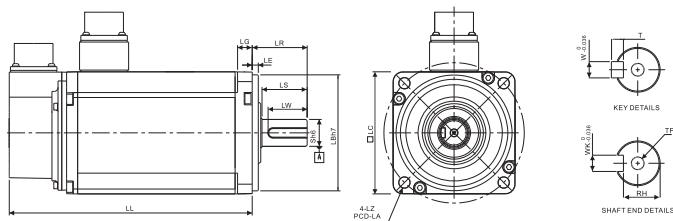

Model	E11310□S	E11315□S	C11020□S	E11320□S
LC	130	130	100	130
LZ	9	9	9	9
LA	145	145	115	145
S	22 (+0 -0.013)	22 (+0 -0.013)	22(+0 -0.013)	22(+0 -0.013)
LB	110 (+0 -0.035)	110 (+0 -0.035)	95(+0 -0.035)	110(+0 -0.035)
LL (W/O Brake)	147.5	167.5	199	187.5
LL (With Brake)	183.5	202	226	216
LS	47	47	37	47
LR	55	55	45	55
LE	6	6	5	6
LG	11.5	11.5	12	11.5
LW	36	36	32	36
RH	18	18	18	18
WK	8	8	8	8
W	8	8	8	8
T	7	7	7	7
TP	M6 Depth 20	M6 Depth 20	M6 Depth 20	M6 Depth 20




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

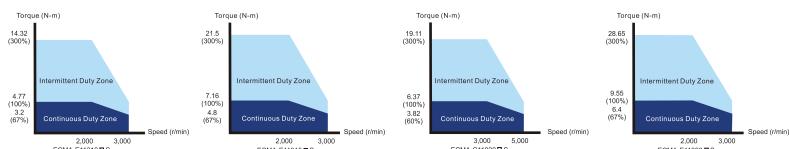

# Servo Motor Dimensions

## 220V Series

Frame Size 180mm (Units: mm)

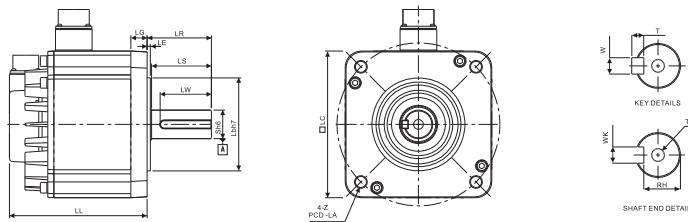


Model	E11820□S	E11830□S	F11830□S	F11845□S	F11855□3	F11875□3
LC	180	180	180	180	180	180
LZ	13.5	13.5	13.5	13.5	13.5	13.5
LA	200	200	200	200	200	200
S	35( <sup>+0</sup> <sub>-0.016</sub> )	42( <sup>+0</sup> <sub>-0.016</sub> )	42( <sup>+0</sup> <sub>-0.016</sub> )			
LB	114.3( <sup>+0</sup> <sub>-0.035</sub> )					
LL (W/O Brake)	169	202.1	202.1	235.3	279.7	342.0
LL (With Brake)	203.1	235.3	235.3	279.3	311.7	376.1
LS	73	73	73	73	108.5	108.5
LR	79	79	79	79	113	113
LE	4	4	4	4	4	4
LG	20	20	20	20	20	20
LW	63	63	63	63	90	90
RH	30	30	30	30	37	37
WK	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	12 <sup>0</sup> <sub>-0.043</sub>	12 <sup>0</sup> <sub>-0.043</sub>
W	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	12 <sup>0</sup> <sub>-0.043</sub>	12 <sup>0</sup> <sub>-0.043</sub>
T	8	8	8	8	8	8
TP	M12 Depth 25	M12 Depth 25	M12 Depth 25	M12 Depth 25	M16 Depth 32	M16 Depth 32



- 1) Dimensions are in millimeters.  
2) Dimensions of the servo motors may be revised without prior notice.  
3) The boxes ( ) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

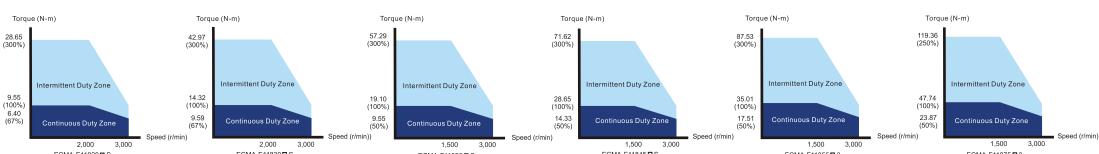

# Servo Motor Dimensions

## 220V Series

Frame Size 220mm and above (Units: mm)

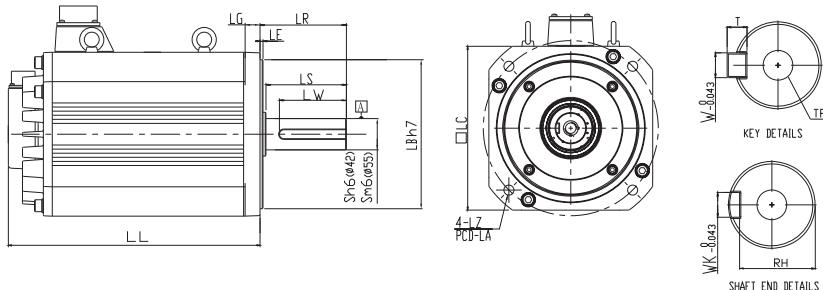

Model	F1221B□3	F1221F□S
LC	220	220
LZ	13.5	13.5
LA	235	235
S	42 ( <sup>+0</sup> <sub>-0.016</sub> )	55 ( <sup>+0.03</sup> <sub>-0.011</sub> )
LB	200 ( <sup>+0</sup> <sub>-0.046</sub> )	200 ( <sup>+0</sup> <sub>-0.046</sub> )
LL (W/O Brake)	338	457
LL (With Brake)	-	-
LS	108	108
LR	116	116
LE	4	4
LG	20	20
LW	90	90
RH	37	49
WK	12	16
W	12	16
T	8	10
TP	M16 Depth 32	M20 Depth 40




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

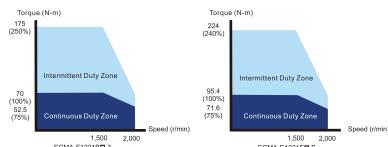

# Servo Motor Dimensions

## 400V Series

Frame Size 80mm and below (Units: mm)

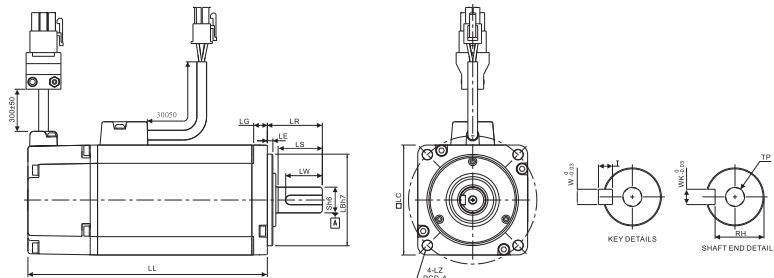

Model	J10807□S
LC	80
LZ	6.6
LA	90
S	19( <sup>+0.013</sup> <sub>-0.013</sub> )
LB	70( <sup>+0.030</sup> <sub>-0.030</sub> )
LL (W/O Brake)	138.3
LL (With Brake)	178
Ls (W/O Oil Seal)	32
Ls (With Oil Seal)	29.5
LR	35
LE	3
LG	8
LW	25
RH	15.5
WK	6
W	6
T	M6
TP	Depth 20



- 1) Dimensions are in millimeters.  
2) Dimensions of the servo motors may be revised without prior notice.  
3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)



# Servo Motor Dimensions

## 400V Series

Frame Size 130mm (Units: mm)

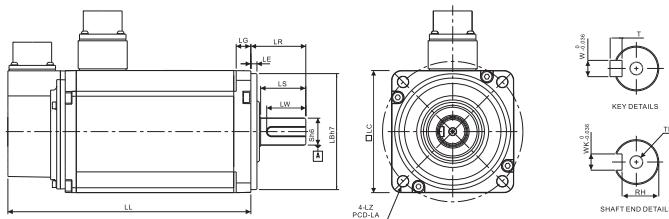

Model	K11310□S	K11315□S	K11320□S
LC	130	130	130
LZ	9	9	9
LA	145	145	145
S	22 ( <sup>+0</sup> <sub>-0.13</sub> )	22 ( <sup>+0</sup> <sub>-0.13</sub> )	22 ( <sup>+0</sup> <sub>-0.13</sub> )
LB	110 ( <sup>+0</sup> <sub>-0.35</sub> )	110 ( <sup>+0</sup> <sub>-0.35</sub> )	110 ( <sup>+0</sup> <sub>-0.35</sub> )
LL (W/O Brake)	147.5	167.5	187.5
LL (With Brake)	183.5	202	216
LS	47	47	47
LR	55	55	55
LE	6	6	6
LG	11.5	11.5	11.5
LW	36	36	36
RH	18	18	18
WK	8	8	8
W	8	8	8
T	7	7	7
TP	M6 Depth 20	M6 Depth 20	M6 Depth 20




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

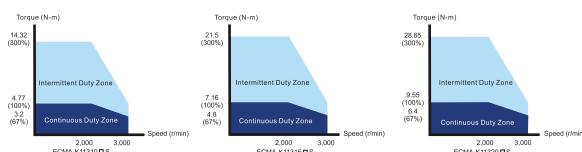

# Servo Motor Dimensions

## 400V Series

Frame Size 180mm and above (Units: mm)

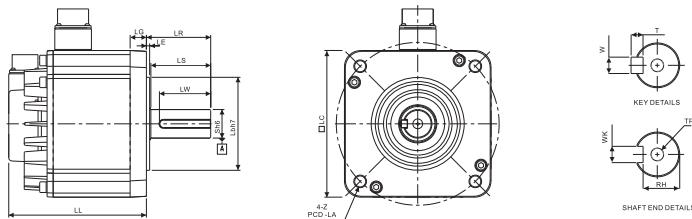


Model	L11830□S	L11845□S	L11855□3	L11875□3
LC	180	180	180	180
LZ	13.5	13.5	13.5	13.5
LA	200	200	200	200
S	35 ( <sup>+0</sup> <sub>-0.016</sub> )	35 ( <sup>+0</sup> <sub>-0.016</sub> )	42 ( <sup>+0</sup> <sub>-0.016</sub> )	42 ( <sup>+0</sup> <sub>-0.016</sub> )
LB	114.3 ( <sup>+0</sup> <sub>-0.035</sub> )			
LL (W/O Brake)	202.1	235.3	279.7	342.0
LL (With Brake)	235.3	279.3	311.7	376.1
LS	73	73	108.5	108.5
LR	79	79	113	113
LE	4	4	4	4
LG	20	20	20	20
LW	63	63	90	90
RH	30	30	37	37
WK	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	12 <sup>0</sup> <sub>-0.043</sub>	12 <sup>0</sup> <sub>-0.043</sub>
W	10 <sup>0</sup> <sub>-0.036</sub>	10 <sup>0</sup> <sub>-0.036</sub>	12 <sup>0</sup> <sub>-0.043</sub>	12 <sup>0</sup> <sub>-0.043</sub>
T	8	8	8	8
TP	M12 Depth 25	M12 Depth 25	M16 Depth 32	M16 Depth 32



- 1) Dimensions are in millimeters.  
2) Dimensions of the servo motors may be revised without prior notice.  
3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).


## Speed-Torque Curves (T-N Curves)

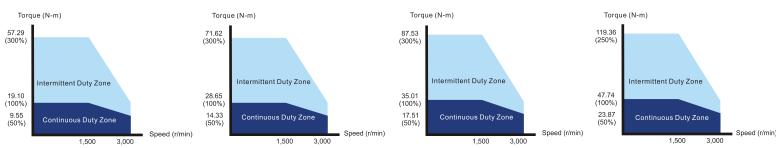

# Servo Motor Dimensions

## 400V Series

Frame Size 400mm and above (Units: mm)

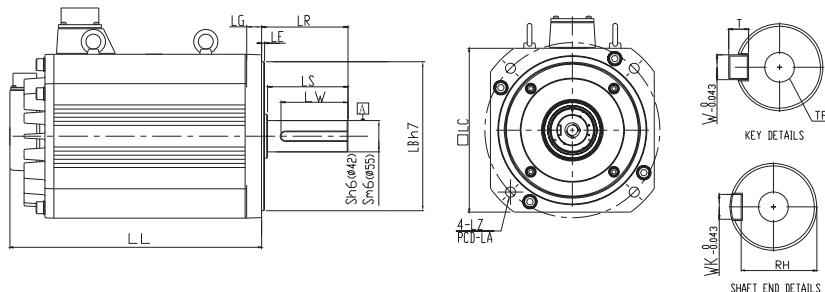

Model	L1221B□3	L1221F□5
LC	220	220
LZ	13.5	13.5
LA	235	235
S	42 ( <sup>+0.016</sup> <sub>-0.016</sub> )	55 ( <sup>+0.03</sup> <sub>-0.011</sub> )
LB	200 ( <sup>+0</sup> <sub>-0.046</sub> )	200 ( <sup>+0</sup> <sub>-0.046</sub> )
LL (W/O Brake)	338	457
LL (With Brake)	-	-
LS	108	108
LR	116	116
LE	4	4
LG	20	20
LW	90	90
RH	37	49
WK	12	16
W	12	16
T	8	10
TP	M16 Depth 32	M20 Depth 40




1) Dimensions are in millimeters.

2) Dimensions of the servo motors may be revised without prior notice.

3) The boxes (□) in the model names are for optional configurations(keyway, brake and oil seal).

## Speed-Torque Curves (T-N Curves)

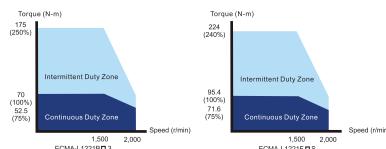

# Part Names and Functions

## ● LED Display / Operation Panel / Charge LED

### ■ LED Display

The 5 digit, 7 segment LED displays the servo status or fault codes.

### ■ Operation Panel

Function keys used to perform status display, monitor and diagnostic, function and parameter setting.

Function Keys:

MODE : Press this key to select/ change mode

SHIFT : Press this key to shift cursor to the left

UP : Press this key to increase values on the display

DOWN : Press this key to decrease values on the display

SET : Press this key to store data

### ■ Charge LED

A lit LED indicates that either power is connected to the servo drive or a residual charge is present in the drive's internal power components.

Operation Panel

Charge LED

LED Display

## ● \*Full-Closed Control Interface

- Used to connect linear scale and encoder for controlling A, B, Z phase signals.

## ● I/O Interface

- Used to connect Delta's DVP series PLC or other external controllers for controlling I/O signals.

## ● \* High-speed Communication Port

- Used to connect CANopen networks.
- 1-in/1-out communication ports offer easy serial connection.
- CANbus interface, supporting motion modes for CANopen DS402 implementation.

## ● Motor Encoder Interface

- Used to connect the encoder of the servo motor

## ● \* Extension Digital Input Connection Port

- Used to connect a removable digital input terminal block. Max. 6 digital inputs can be added.

## ● Serial Communication Port

- Used to connect PLC, HMI, and other controllers for RS-485 / RS-232 serial communication.

## ● USB Connection Port

- Used to connect personal computers or notebooks.
- Ver 1.1 USB is equipped as standard.
- Direct connectivity to personal computers or notebooks, capable of accessing data through ASDA-Soft configuration software.
- Monitor speed upon software is up to 1Mbps.



## ● Internal & External Regenerative Resistor Terminal / Control Circuit Terminal / Main Circuit Terminal

### ■ Internal & External Regenerative Resistor Terminal

1. When using an external resistor, connect it to P<sup>⊕</sup> and C, and ensure an open circuit between P<sup>⊕</sup> and D.
2. When using an internal resistor, ensure the circuit is closed between P<sup>⊕</sup> and D, and the circuit is open between P<sup>⊕</sup> and C. (Note: Please refer to the table of regenerative resistor specifications for the models with a built-in regenerative resistor.)

3. When using an external braking unit, connect it to P<sup>⊕</sup> and ⊖, and ensure an open circuit between P<sup>⊕</sup> and D, and P<sup>⊕</sup> and C

### ■ Control Circuit Terminal (L1C, L2C or DC24V, DC0V)

220V Series: L1C, L2C are used to connect 200~230Vac, 50/60Hz single-phase or three-phase power supply.


400V Series: DC24V, DC0V are used to connect 24Vdc ±10% power supply.

### ■ Main Circuit Terminal (R, S, T)

220V Series: Used to connect 200~230Vac, 50/60Hz commercial power supply.

400V Series: Used to connect 380~480Vac, 50/60Hz commercial power supply.

■ When using an external braking unit, connect it to P<sup>⊕</sup> and ⊖.

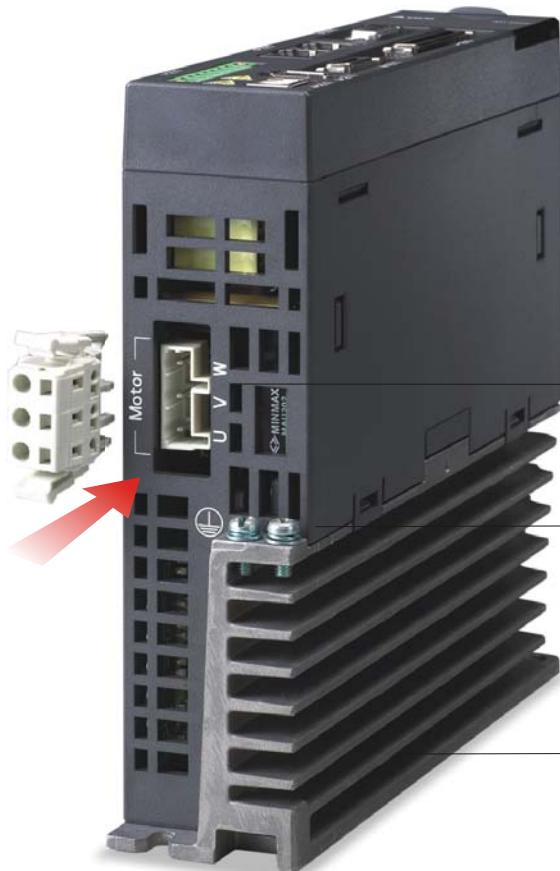

## ● Servo Motor Output (U, V, W)

- Used to connect servo motor. Never connect the output terminal to main circuit power as the AC drive may be damaged beyond repair if incorrect cables are connected to the output terminals.

## ● Ground Terminal

- Used to connect grounding wire of power supply and servo motor.

## ● Heatsink

- Used to secure servo drive and for heat dissipation.


Please note:  
\*This is a Delta optional part.

# Standard Connection Examples


## 220V Series

### Position (PT) Control Mode (for Pulse Command Input)


Pulse input, for the use of internal power supply (Open-collector input)




Pulse input, for the use of external power supply (Open-collector input)





Pulse input (Line driver)



High-speed pulse input (Line driver)




Servo Drive

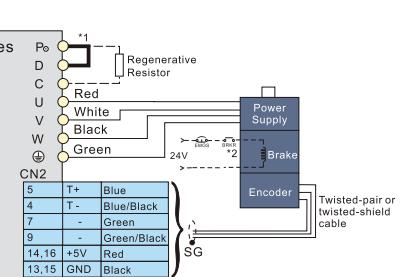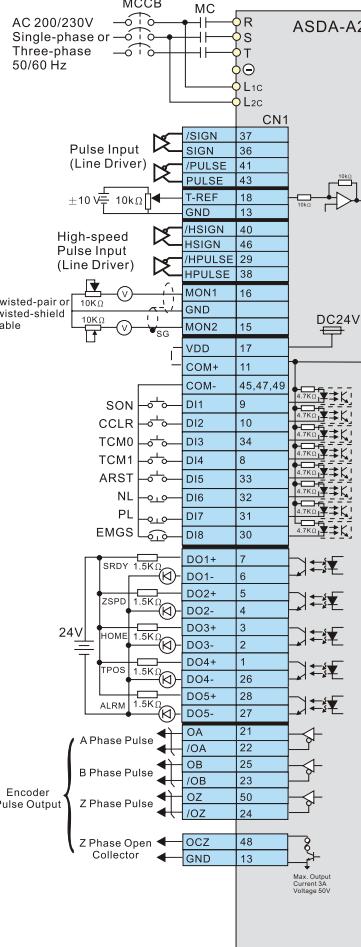

Please note:  
 \*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.  
 \*2 The brake oil has no polarity.

## 220V Series

### Position (PR) Control Mode (for Internal Procedure Control)

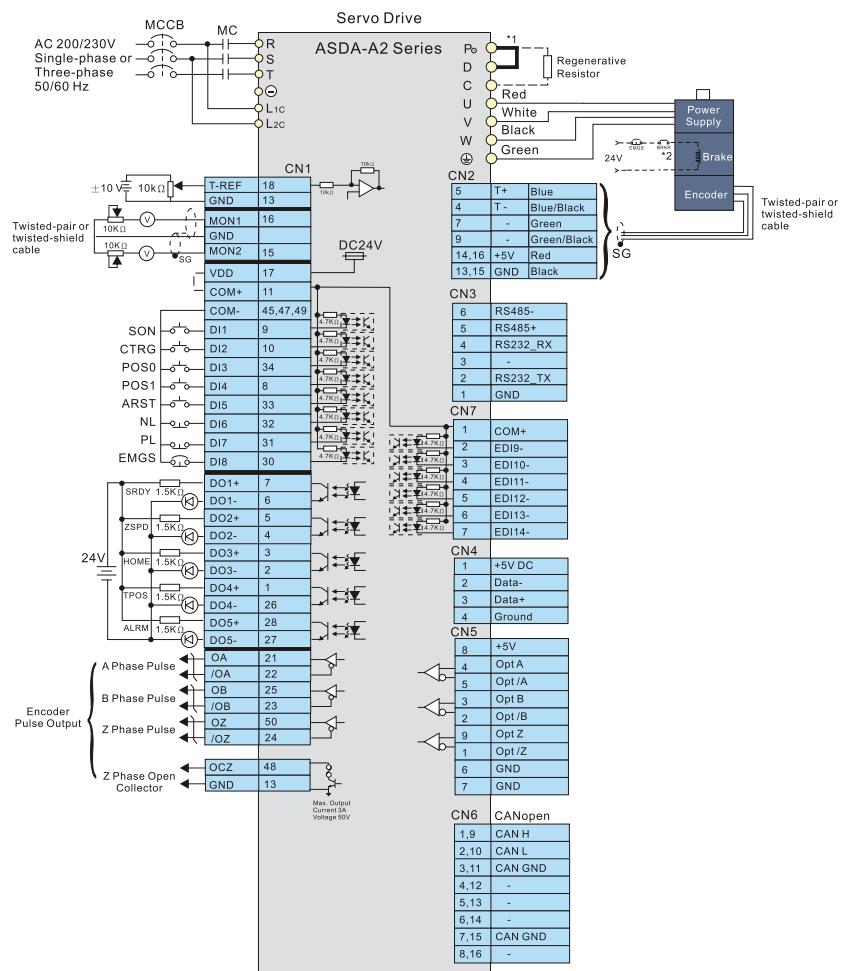

Please note:


\*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.

\*2 The brake oil has no polarity.

# Standard Connection Examples

## 220V Series


Speed(S), Torque(T) Control Mode (for Analog Voltage Input and Internal Parameter Setting)

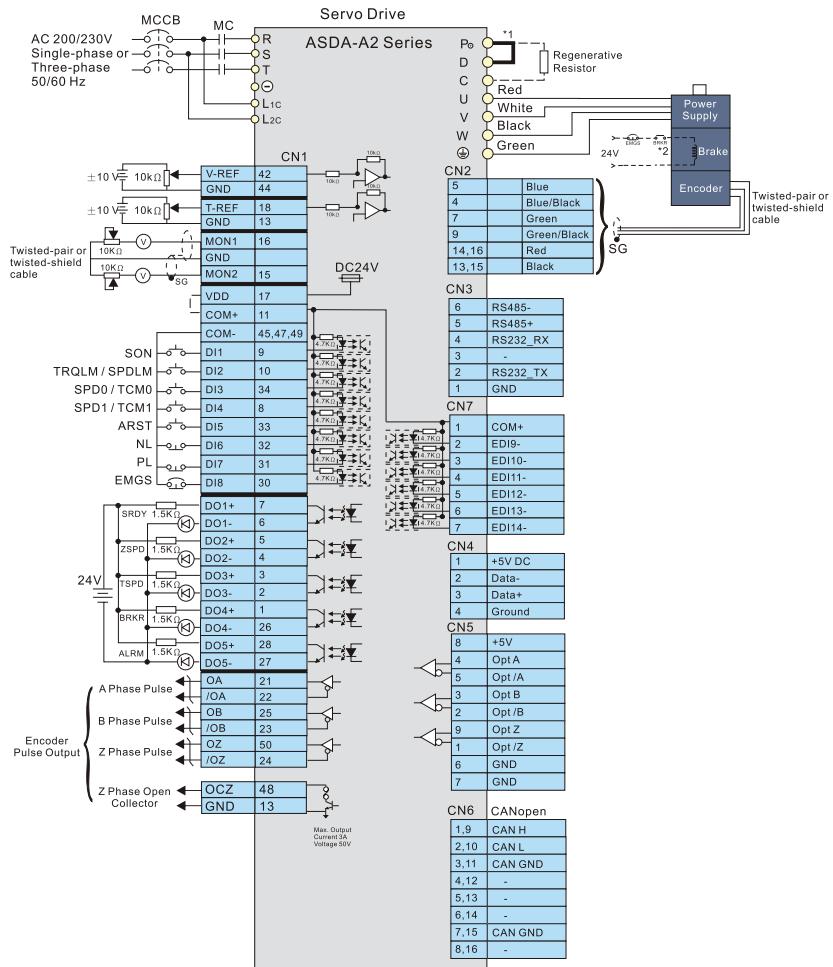

Please note:  
 \*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.  
 \*2 The brake oil has no polarity.

## 220V Series

### CANopen Communication Mode (for ASDA-A2-M Series)

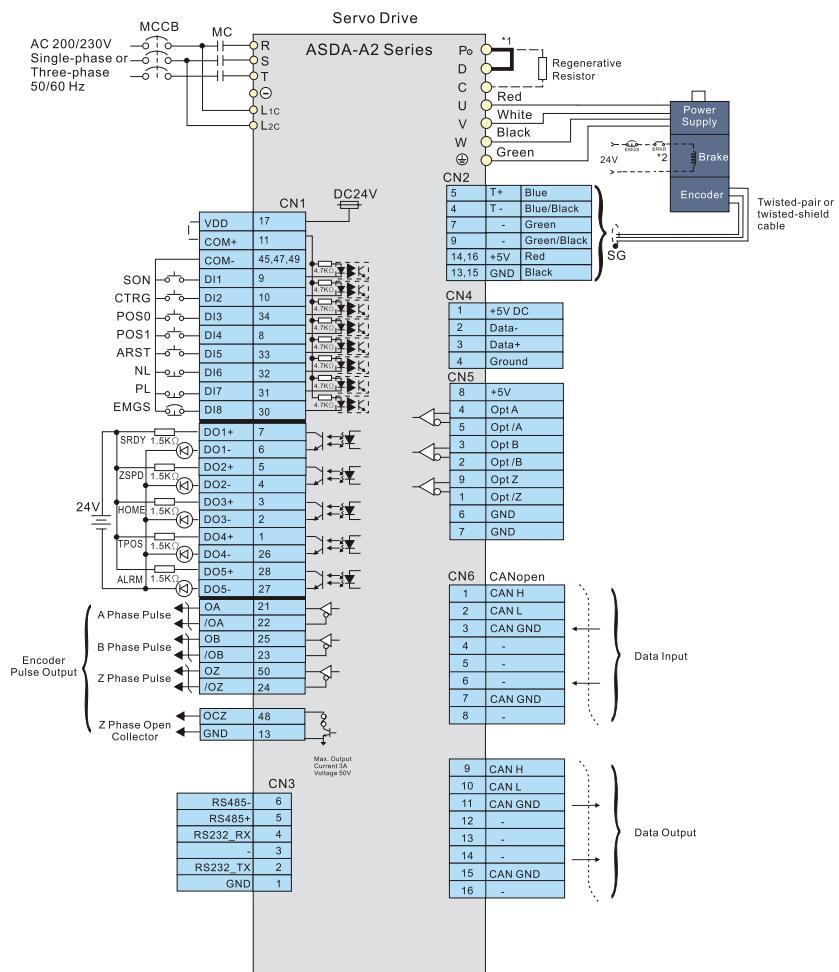

Please note:

\*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.


\*2 The brake oil has no polarity.

# Standard Connection Examples


## 400V Series

### Position (PT) Control Mode (for Pulse Command Input)


Pulse input, for the use of internal power supply (Open-collector input)



Pulse input, for the use of external power supply (Open-collector input)




Pulse input (Line driver)




Because this photocoupler is an unidirectional optocoupler, please pay close attention on the current direction of input pulse command.

High-speed pulse input (Line receiver)




Caution: Ensure that the ground terminals of the controller and the servo drive are connected to each other.

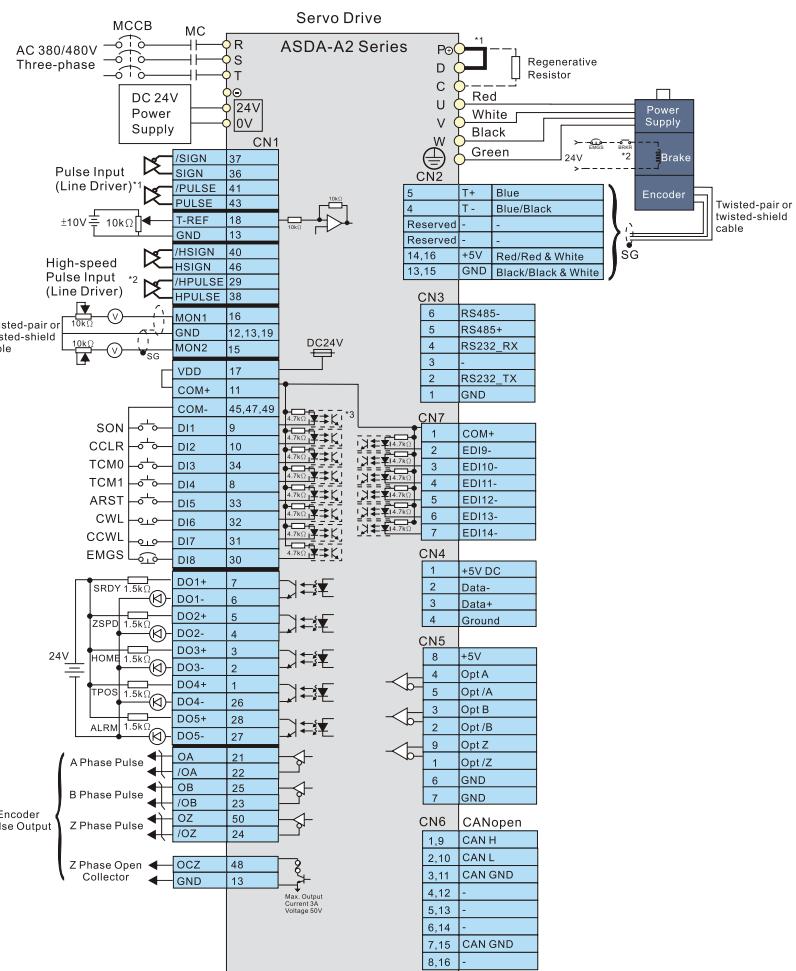

Please note:  
 \*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.  
 \*2 The brake oil has no polarity.

## 400V Series

### Position (PR) Control Mode (for Internal Procedure Control)

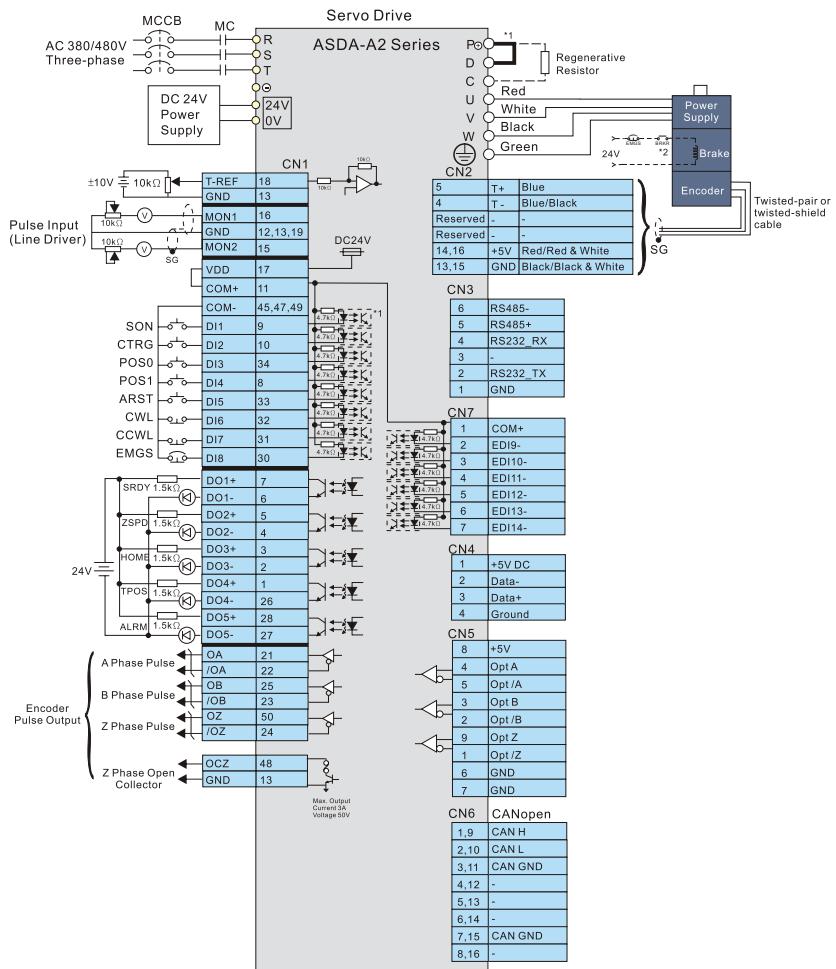

Please note:


\*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.

\*2 The brake oil has no polarity.

# Standard Connection Examples

## 400V Series


Speed(S), Torque(T) Control Mode (for Analog Voltage Input and Internal Parameter Setting)

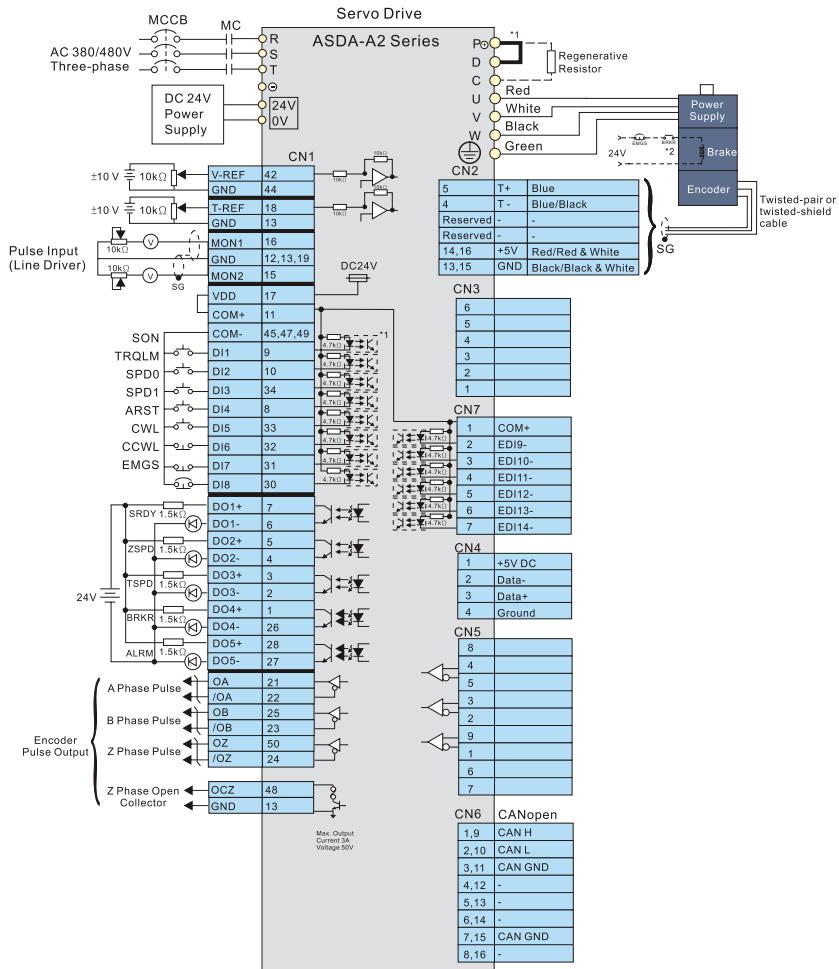

Please note:  
 \*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.  
 \*2 The brake oil has no polarity.

## 220V Series

### CANopen Communication Mode (for ASDA-A2-M Series)

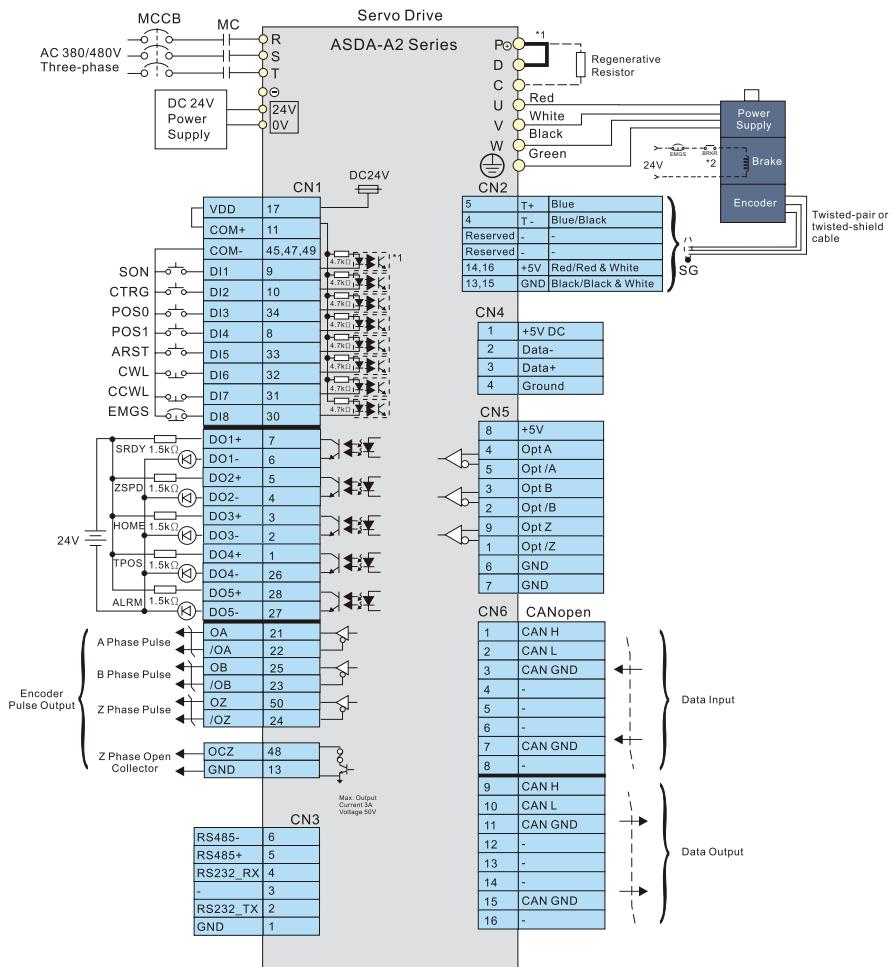


Please note:


\*1 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.

\*2 The brake oil has no polarity.


# ASDA-Soft Configuration Software

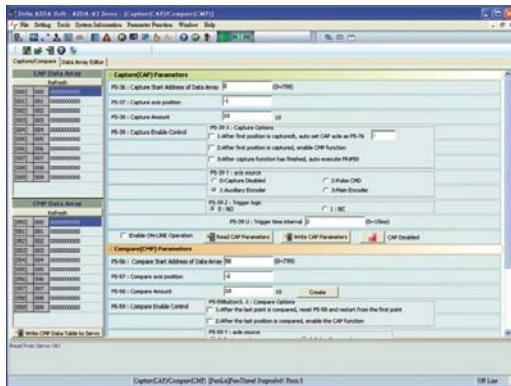


- Strong CAPTURE and COMPARE functions for position latch and detection help you complete system configuration quickly.

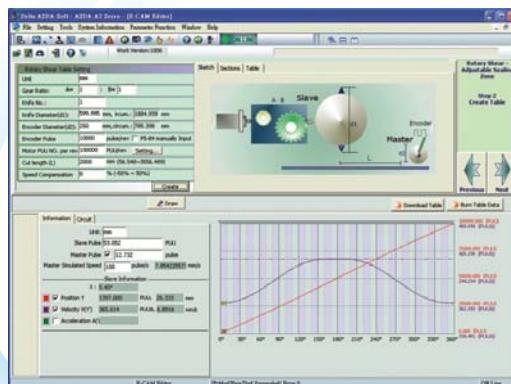


- User-friendly E-Cam editing interface is provided for designing E-Cam outlines and curves freely. In addition, quick settings for flying shear and rotary cut applications are offered.

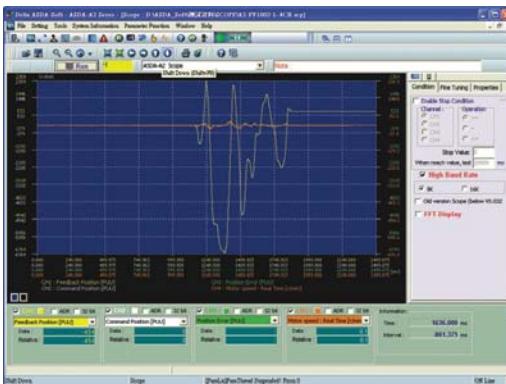

- Versatile on-line monitoring function, similar to a digital oscilloscope is able to quickly record the status and data of each axis. Real-time monitoring is easy.

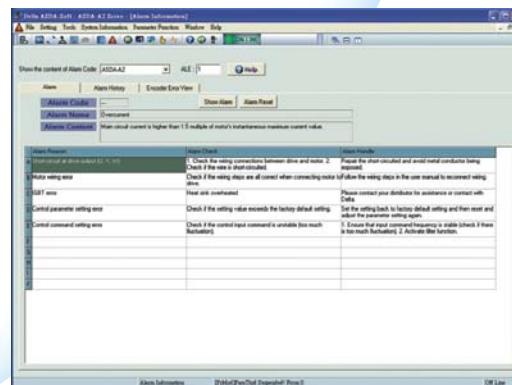

- Convenient alarm display function is capable of troubleshooting the system easily and recommending timely corrective actions .

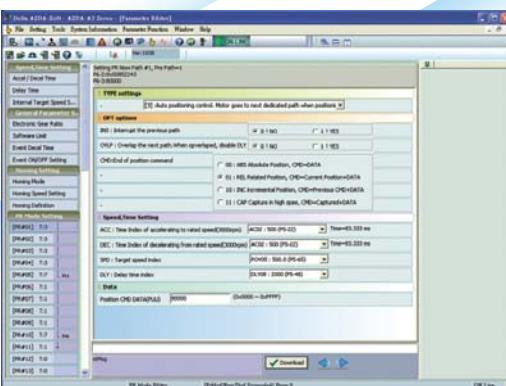

- Easy-to-use editing interface is designed for new and enhanced PR control mode. Homing, point-to-point and other motion control functions for multi-axis positioning control are easily achieved.

## Optional Accessories

### ● Quick Connectors

- Used for 100W to 300W servo drives
- One operating lever is provided for wire to terminal block insertion.



### ● Power Cables

- 3m and 5m standard cables are available.
- Customized service is offered to meet the needs of customers.
- Two types are selectable: with brake and without brake.



### ● Encoder Cables

- 3m and 5m standard cables are available.
- Customized service is offered to meet the needs of customers.



### ● RS-232 Communication Cables

- Connects ASDA-A2 to PLC, HMI, and other controllers via RS-232 communication.
- Standard cable length is 3m.





#### ● Terminal Block Modules

- Easy installation and wiring
- 0.5m connection cable is provided.
- Easy to reduce the space required.
- Easy to expand system's I/O configuration.

#### ● Regenerative Resistors

- For selecting a regenerative resistor, please refer to the table of regenerative resistor specifications on page 70.



#### ● USB Communication Cables (for PC)

- Connects ASDA-A2 to a PC (via ASDA-Soft configuration software)
- USB1.1 is equipped as standard.



#### ● CANopen Accessories

- Delta's TAP-CN03 distribution box connects ASDA-A2 to Delta's PLC CAN Master.
- CANopen communication cable is provided. Standard cable length is 0.5m and 1m.

#### ● RS-485 Connectors

- Used to connect multiple ASDA-A2 series products by RS-485 interface through Modbus serial communication.

# Servo Drive Specifications

## 220V Series

Model: ASDA-A2 Series		100W	200W	400W	750W	1kW	2kW	1.5kW	3kW	4.5kW	5.5kW	7.5kW	11kW	15kW																						
		01	02	04	07	10	20	15	30	45	55	75	1B	1F																						
Power supply	Phase / Voltage	Three-phase / Single-phase 220VAC										Three-phase 220VAC																								
	Permissible Voltage Range	Three-phase / Single-phase 200~230VAC -15%~10%										Three-phase 200~230VAC -15%~10%																								
	Continuous Output Current	0.9 Arms	1.55 Arms	2.6 Arms	5.1 Arms	7.3 Arms	8.3 Arms	13.4 Arms	19.4 Arms	32.5 Arms	40 Arms	47.5 Arms	54.4 Arms	70 Arms																						
Cooling System		Natural Air Circulation					Fan Cooling																													
Encoder Resolution / Feedback Resolution		Incremental : 20-bit (1280000 p/rev) : Absolute : 17-bit																																		
Control of Main Circuit		SVPWM(Space Vector Pulse Width Modulation) Control																																		
Tuning Modes		Auto / Manual																																		
Dynamic Brake		None			Built-in			External																												
Position Control Mode	Max. Input Pulse Frequency	Max. 500Kpps / 4Mpps (Line driver), Max. 200Kpps (Open collector)																																		
	Pulse Type	Pulse + Direction, A phase + B phase, CCW pulse + CW pulse																																		
	Command Source	External pulse train (PT mode) / Internal parameters (PR mode)																																		
	Smoothing Strategy	Low-pass and P-curve filter																																		
	Electronic Gear	Electronic gear N/M multiple N: 1~32767, M: 1:32767 (1/50<N/M<25600)																																		
	Torque Limit Operation	Set by parameters																																		
	Feed Forward Compensation	Set by parameters																																		
Speed Control Mode	Analog Input Command	Voltage Range	0~±10 VDC																																	
		Input Resistance	10KΩ																																	
		Time Constant	2.2 μs																																	
	Speed Control Range *1	1:5000					1:3000					1:2000																								
Command Source		External analog signal / Internal parameters																																		
Smoothing Strategy		Low-pass and S-curve filter																																		
Torque Limit Operation		Set by parameters or via analog input																																		
Frequency Response Characteristic		Maximum 1kHz																																		
Speed Accuracy *2 (at rated rotation speed)		0.01% or less at 0 to 100% load fluctuation																																		
		0.01% or less at 0 to 10% power fluctuation																																		
Torque Control Mode	Analog Input Command	Voltage Range	0~±10 VDC																																	
		Input Resistance	10KΩ																																	
		Time Constant	2.2 μs																																	
	Command Source	External analog signal / Internal parameters																																		
Smoothing Strategy		Low-pass filter																																		
Speed Limit Operation		Set by parameters or via analog input																																		
Analog Monitor Output		Monitor signal can set by parameters (Output voltage range: ±8V)																																		
Digital Inputs/Outputs	Inputs		Servo on, Reset, Gain switching, Pulse clear, Zero speed CLAMP, Command input reverse control, Command triggered, Speed/Torque limit enabled, Position command selection, Motor stop, Speed position selection, Position / Speed mode switching, Speed / Torque mode switching, Torque / Position mode switching, PT / PR command switching, Emergency stop, Forward / Reverse inhibit limit, Reference "Home" sensor, Forward / Reverse operation torque limit, Move to "Home", Electronic Cam (E-Cam), Forward / Reverse JOG input, Event trigger PR command, Electronic gear ratio (Numerator) selection and Pulse inhibit input																																	
	Outputs		Encoder signal output (A, B, Z Line Driver and Z Open Collector )																																	
Protective Functions		Overcurrent, Overvoltage, Undervoltage, Motor overheated, Regeneration error, Overload, Overspeed, Abnormal pulse control command, Excessive deviation, Encoder error, Adjustment error, Emergency stop activated, Reverse/ Forward limit switch error, Position excessive deviation of full-close control loop, Serial communication error, Input power phase loss, Serial communication time out, short circuit protection of U, V, W, and CN1, CN2, CN3 terminals																																		
Communication Interface		RS-232 / RS-485 / CANopen / USB / DMNCNET																																		
Environment	Installation Site	Indoor location (free from direct sunlight), no corrosive liquid and gas (far away from oil mist, flammable gas, dust)																																		
	Altitude	Altitude 1000m or lower above sea level																																		
	Atmospheric Pressure	86kPa~106kPa																																		
	Operating Temperature	0°C ~ 55°C (If operating temperature is above 45 °C, forced cooling will be required)																																		
	Storage Temperature	-20°C ~ 65°C																																		
	Humidity	0~90% RH (non-condensing)																																		
	Vibration	9.80665m/s <sup>2</sup> (1G) less than 20Hz, 5.88m/s <sup>2</sup> (0.6G) 20 to 50Hz																																		
IP Rating		IP20																																		
Power System		TN System*3																																		
Approvals		IEC / EN 61800-5-1, UL508C																																		

Footnote: \*1 Rated rotation speed: When full load, speed ratio is defined as the minimum speed (the motor will not pause).

\*2 When command is rated rotation speed, the speed fluctuation rate is defined as: (Empty load rotation speed - Full load rotation speed) / Rated rotation speed

\*3 TN system: A power distribution system having one point directly earthed, the exposed conductive parts of the installation being connected to that point by protective earth conductor.

## 400V Series

Model: ASDA-A2 Series		750W	1kW	1.5kW	20kW	3kW	4.5kW	5.5kW	7.5kW	11kW	15kW																			
Control Power	Input Voltage	07		24VDC ±10%																										
	Input Current	0.89A		1.18A		1.66A																								
	Input Power	21.4W		28.2W		39.85W																								
Permissible Voltage Range		Three-phase 380~480VAC ±10%																												
Continuous Output Current		3.07 Arms	3.52 Arms	5.02 Arms	6.66 Arms	11.9 Arms	20 Arms	22.37 Arms	30 Arms	28.1 Arms	38.2 Arms																			
Cooling System																														
Encoder Resolution / Feedback Resolution																														
Control of Main Circuit																														
Tuning Modes																														
Dynamic Brake																														
Position Control Mode	Built-in		External																											
	Max. Input Pulse Frequency		Max. 500Kpps / 4Mpps (Line driver), Max. 200Kpps (Open collector)																											
	Pulse Type		Pulse + Direction, A phase + B phase, CCW pulse + CW pulse																											
	Command Source		External pulse train (PT mode) / Internal parameters (PR mode)																											
	Smoothing Strategy		Low-pass and P-curve filter																											
	Electronic Gear		Electronic gear N/M multiple N: 1~32767, M: 1:32767 (1/50~N/M=25600)																											
Speed Control Mode	Torque Limit Operation		Set by parameters																											
	Feed Forward Compensation		Set by parameters																											
	Analog Input Command	Voltage Range		0±10 VDC																										
		Input Resistance		10K Ω																										
		Time Constant		2.2 μs																										
	Speed Control Range <sup>*1</sup>		1:5000		1:3000																									
Torque Control Mode	Command Source		External analog signal / Internal parameters																											
	Smoothing Strategy		Low-pass and S-curve filter																											
	Torque Limit Operation		Set by parameters or via analog input																											
	Frequency Response Characteristic		Maximum 1kHz																											
	Speed Accuracy <sup>*2</sup> (at rated rotation speed)		0.01% or less at 0 to 100% load fluctuation 0.01% or less at ±10% power fluctuation 0.01% or less at 0 oC to 50 oC ambient temperature fluctuation																											
	Analog Input Command	0±10 VDC																												
Digital Inputs/Outputs		10K Ω																												
		2.2 μs																												
Encoder Signal		External analog signal / Internal parameters																												
Command Source		Low-pass filter																												
Smoothing Strategy		Set by parameters or via analog input																												
Speed Limit Operation																														
Analog Monitor Output													Monitor signal can set by parameters (Output voltage range: ±8V)																	
Protective Functions	Inputs		Servo on, Reset, Gain switching, Pulse clear, Zero speed CLAMP, Command input reverse control, Command triggered, Speed/Torque limit enabled, Position command selection, Motor stop, Speed position selection, Position / Speed mode switching, Speed / Torque mode switching, Torque / Position mode switching, PT / PR command switching, Emergency stop, Forward / Reverse inhibit limit, Reference "Home" sensor, Forward / Reverse operation torque limit, Move to "Home", Electronic cam, Forward / Reverse JOG input, Event trigger PR command, Electronic gear ratio (Numerator) selection and Pulse inhibit input																											
	Outputs		Encoder signal output (A, B, Z Line Driver and Z Open Collector )																											
	Servo ready, Servo on, At zero speed, At speed reached, At positioning completed, At torque limit, Servo alarm (servo fault) activated, Electromagnetic brake control, Homing completed, Output overload warning, Servo warning activated, Position command overflow, Forward / Reverse software limit, Internal position command completed, Capture operation completed output, Motion control completed output, Master position of E-Cam (Electronic Cam)																													
	Overcurrent, Overvoltage, Undervoltage, Motor overheated, Regeneration error, Overload, Overspeed, Abnormal pulse control command, Excessive deviation, Encoder error, Adjustment error, Emergency stop activated, Reverse / Forward limit switch error, Position excessive deviation of full-close control loop, Serial communication error, Input power phase loss, Serial communication time out, short circuit protection of U, V, W, and CN1, CN2, CN3 terminals																													
	Communication Interface		RS-232 / RS-485 / CANopen / USB / DMCNET																											
	Installation Site		Indoor location (free from direct sunlight), no corrosive liquid and gas (far away from oil mist, flammable gas, dust)																											
Environment	Altitude		Altitude 1000m or lower above sea level																											
	Atmospheric Pressure		86kPa~106kPa																											
	Operating Temperature		0°C ~ 55 °C (If operating temperature is above 45 °C, forced cooling will be required)																											
	Storage Temperature		-20°C ~ 65°C																											
	Humidity		0~90% RH (non-condensing)																											
	Vibration		9.80665m/s <sup>2</sup> (1G) less than 20Hz, 5.88m/s <sup>2</sup> (0.6G) 20 to 50Hz																											
Approvals	IP Rating		IP20																											
	Power System		TN System <sup>*3</sup>																											
CE cULus C		IEC / EN 61800-5-1, UL508C																												

Footnote: \*1 Rated rotation speed: When full load, speed ratio is defined as the minimum speed (the motor will not pause).

\*2 When command is rated rotation speed, the speed fluctuation rate is defined as:

(Empty load rotation speed / Full load rotation speed) / Rated rotation speed

\*3 TN system: A power distribution system having one point directly earthed, the exposed conductive parts of the installation being connected to that point by protective earth conductor.


# Servo Drive Dimensions

## 220V Series

100W / 200W / 400W

Weight


1.5 (3.3)

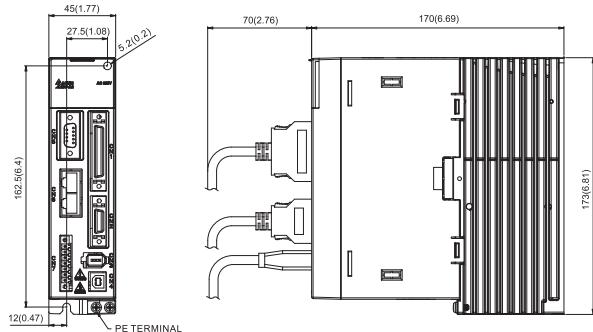

750W / 1.0kW / 1.5kW

Weight


2.0 (4.4)

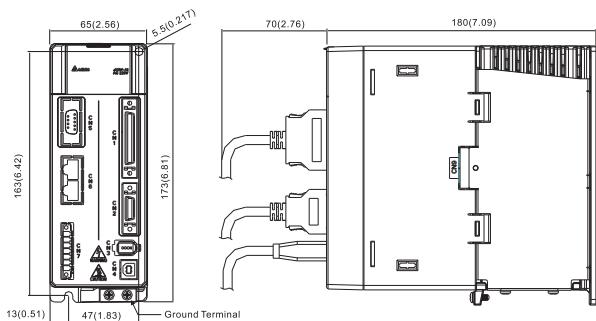

2.0kW / 3.0kW

Weight

2.89 (6.36)

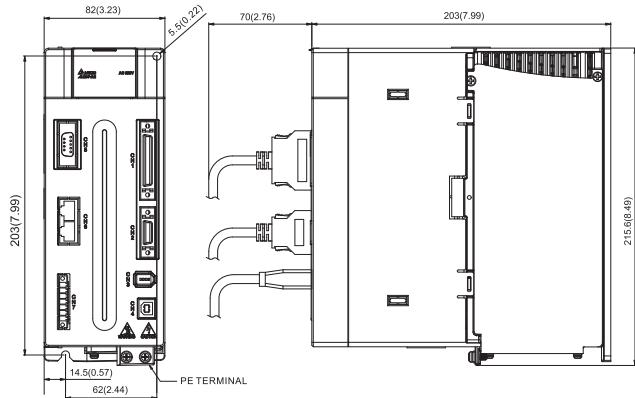

**NOTE**



1) Other accessories for ASDA-A2 series will be increased gradually.

2) Accessories images shown here may differ from actual product appearance. Please refer to the actual product appearance.

## 220V Series



**4.5kW**

Weight
4.4 (10.0)

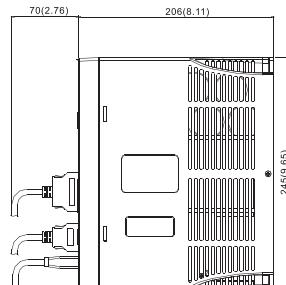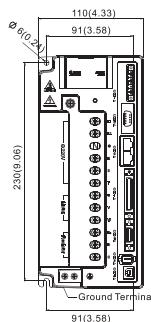



**5.5kW**

Weight
5.5 (12.1)

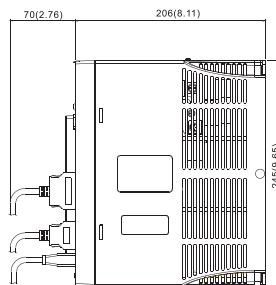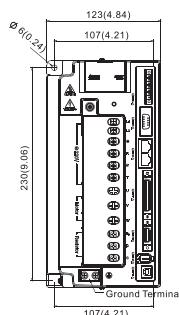

**7.5kW**

Weight
5.9 (13)

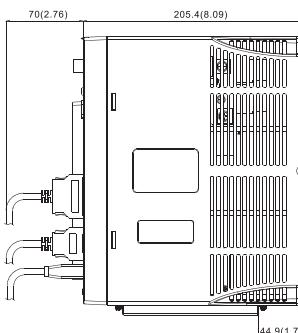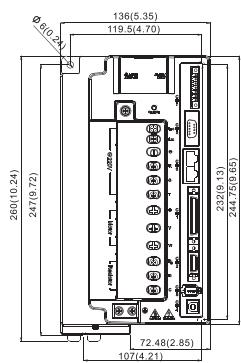





- NOTE**
- 1) Other accessories for ASDA-A2 series will be increased gradually.
  - 2) Accessories images shown here may differ from actual product appearance. Please refer to the actual product appearance.

# Servo Drive Dimensions

## 220V Series

**11kW / 15kW**

Weight  
20 (44)

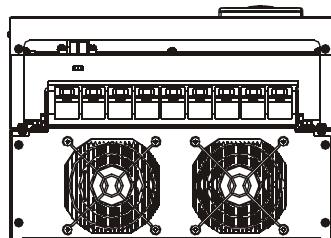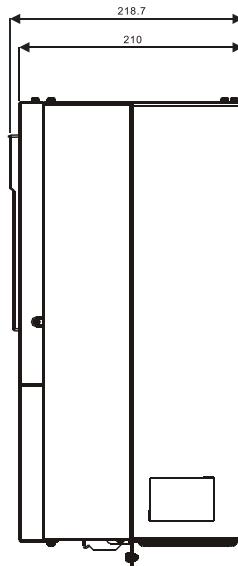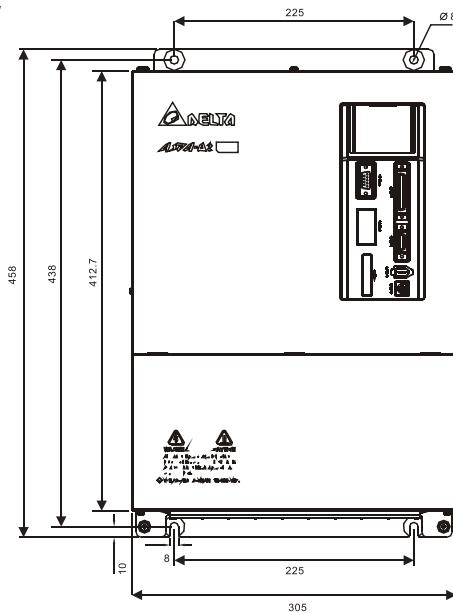

Screw:M 4X 0.7  
Screw Torque:14 (kgf-cm)




- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
- 2) Actual measured values are in metric units. Dimensions and weights in (imperial units) are for reference only.
- 3) The servo drive images shown here may differ from actual product appearance. Please refer to the actual product appearance.
- 4) Dimensions and weights of the servo drive may be revised without prior notice.

## 400V Series


**750W / 1.0kW / 1.5kW**

Weight
2.89(6.36)

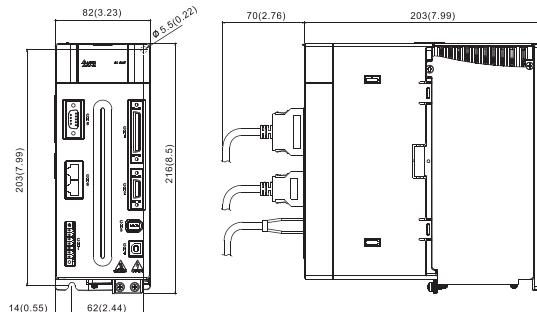


**2.0kW / 3.0kW /  
4.5kW/5.5kW**

Weight
5.5 (12.1)

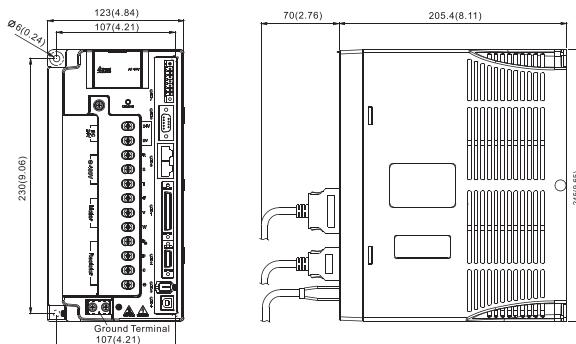

**7.5kW**

Weight
5.5 (12.1)

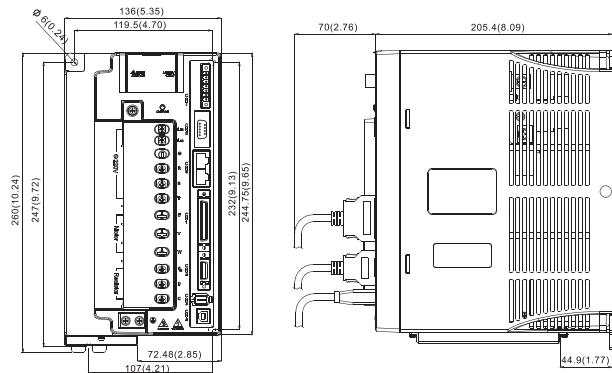

- 1) Other accessories for ASDA-A2 series will be increased gradually.  
2) Accessories images shown here may differ from actual product appearance. Please refer to the actual product appearance.


# Servo Drive Dimensions

## 400V Series

11kW / 15kW

Weight

8.5 (18.7)

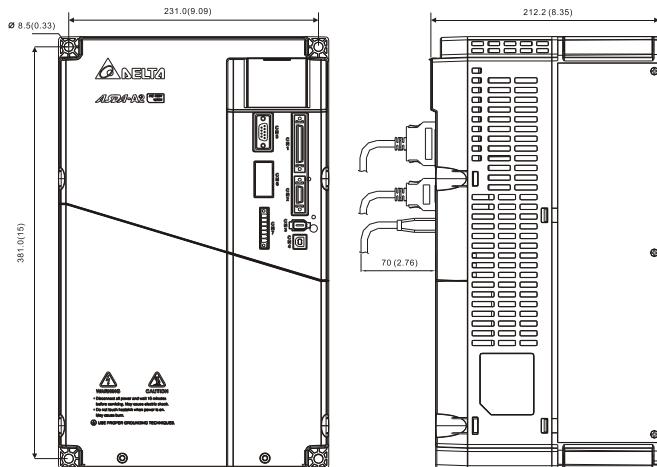

- NOTE**
- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
  - 2) Actual measured values are in metric units. Dimensions and weights in (imperial units) are for reference only.
  - 3) The servo drive images shown here may differ from actual product appearance.  
Please refer to the actual product appearance.
  - 4) Dimensions and weights of the servo drive may be revised without prior notice.



# Optional Cables and Connectors

## ● Power Connectors

**ASDBCAPW0000**



Title	Part No.	Manufacturer
Housing	C4201H00-2*2PA	JOWLE
Terminal	C4201TOP-2	JOWLE

**ASDBCAPW0100**



Title	Part No.	Manufacturer
Housing	C4201H00-2*3PA	JOWLE
Terminal	C4201TOP-2	JOWLE

**ASD-CAPW1000**



MS 3106A-20-18S
-----------------

**ASD-CAPW2000**



MS 3106A-24-11S

**ASD-CAPW4000**



CLAMP: WPS3057-20A

Straight Plug WPS3106A-32-17S


**ASD-CNBR1000**



CLAMP: WPS3106A-10SL-4S-R


## ● Power Cables

**ASD-ABPW0003, ASD-ABPW0005**




Title	Part No.	Manufacturer
Housing	C4201H00-2*2PA	JOWLE
Terminal	C4201TOP-2	JOWLE
Item	Part No.	L mm      inch
1	ASD-ABPW0003	3000±100      118±4
2	ASD-ABPW0005	5000±100      197±4

**ASD-ABPW0103, ASD-ABPW0105**

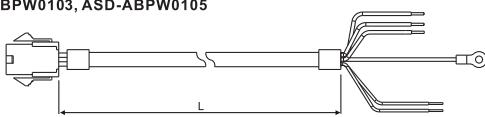

Title	Part No.	Manufacturer
Housing	C4201H00-2*3PA	JOWLE
Terminal	C4201TOP-2	JOWLE
Item	Part No.	L mm      inch
1	ASD-ABPW0103	3000±100      118±4
2	ASD-ABPW0105	5000±100      197±4

**ASD-A2PW2003, ASD-A2PW2005**




Title	Part No.	Manufacturer
Housing	50-36-1735	Molex
Terminal	39-00-0040	Molex
Item	Part No.	L mm      inch
1	ASD-A2PW2003	3000±100      118±4
2	ASD-A2PW2005	5000±100      197±4

## Optional Cables and Connectors


### ● Power Cables

ASD-CAPW1003, ASD-CAPW1005

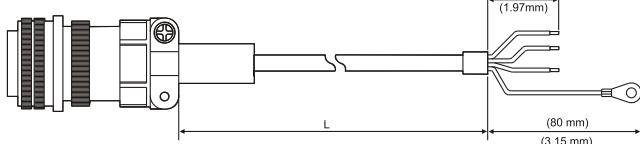


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW1003	3106A-20-18S	3000±100	118±4
2	ASD-CAPW1005	3106A-20-18S	5000±100	197±4

ASD-CAPW1103, ASD-CAPW1105

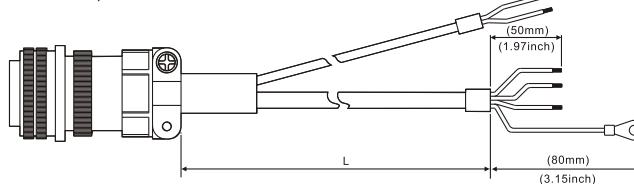


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW1103	3106A-20-18S	3000±100	118±4
2	ASD-CAPW1105	3106A-20-18S	5000±100	197±4

ASD-A2PW1003, ASD-A2PW1005

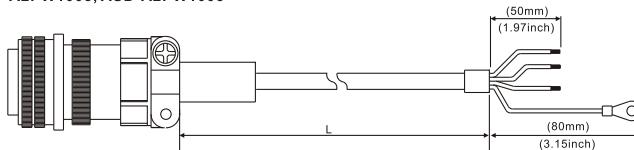

Item	Part No.	Straight	L	
			mm	inch
1	ASD-A2PW1003	3106A-20-18S	3000±100	118±4
2	ASD-A2PW1005	3106A-20-18S	5000±100	197±4


ASD-A2PW1103, ASD-A2PW1105

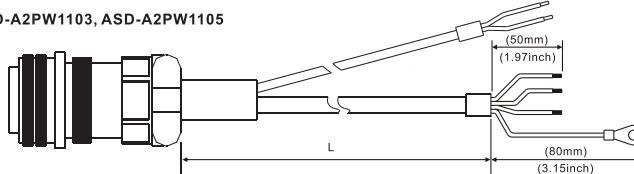

Item	Part No.	Straight	L	
			mm	inch
1	ASD-A2PW1103	3106A-20-18S	3000±100	118±4
2	ASD-A2PW1105	3106A-20-18S	5000±100	197±4


## ● Power Cables

ASD-CAPW1203/1205

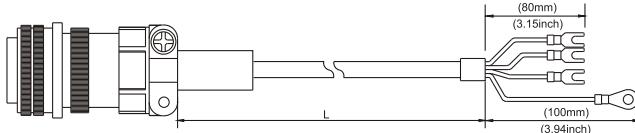


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW1203	3106A-20-18S	3000±100	118±4
2	ASD-CAPW1205	3106A-20-18S	5000±100	197±4

ASD-CAPW1303/1305

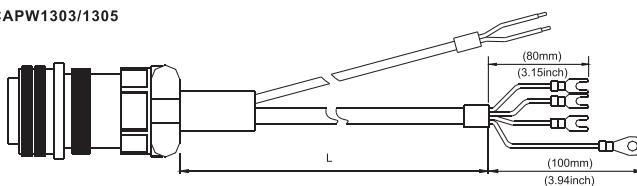


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW1303	3106A-20-18S	3000±100	118±4
2	ASD-CAPW1305	3106A-20-18S	5000±100	197±4

ASD-CAPW2003, ASD-CAPW2005

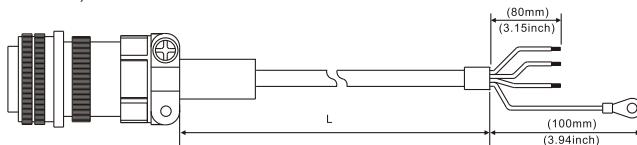

Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2003	3106A-24-11S	3000±100	118±4
2	ASD-CAPW2005	3106A-24-11S	5000±100	197±4

ASD-CAPW2103, ASD-CAPW2105

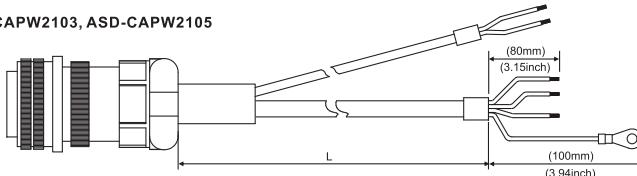


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2103	3106A-24-11S	3000±100	118±4
2	ASD-CAPW2105	3106A-24-11S	5000±100	197±4

## Optional Cables and Connectors


### ● Power Cables

ASD-CAPW2203, ASD-CAPW2205

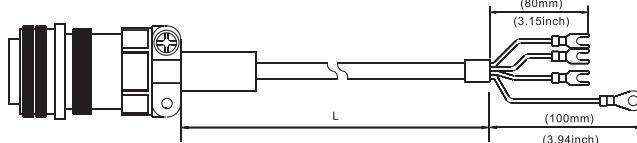


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2203	3106A-24-11S	3000±100	118±4
2	ASD-CAPW2205	3106A-24-11S	5000±100	197±4

ASD-CAPW2303, ASD-CAPW2305

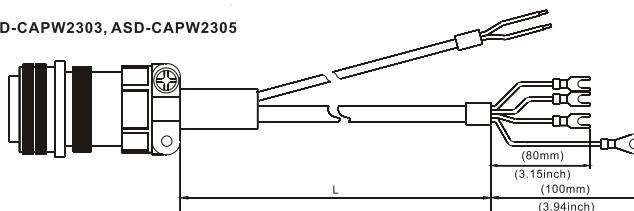


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2303	3106A-24-11S	3000±100	118±4
2	ASD-CAPW2305	3106A-24-11S	5000±100	197±4

ASD-CAPW3203, ASD-CAPW3205

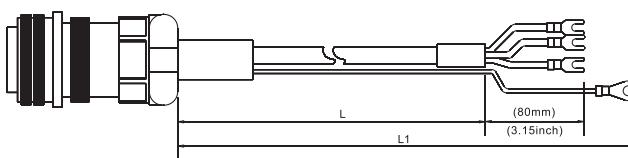

Item	Part No.	Straight	L		L1	
			mm	inch	mm	inch
1	ASD-CAPW3203	MS 3106-24-11S	3000±100	118±4	3100±100	122±0.4
2	ASD-CAPW3205	MS 3106-24-11S	5000±100	197±4	5100±100	201±0.4


ASD-CAPW3303, ASD-CAPW3305

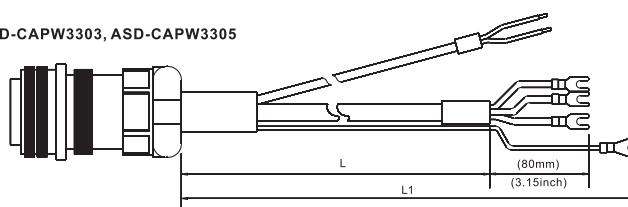

Item	Part No.	Straight	L		L1	
			mm	inch	mm	inch
1	ASD-CAPW3303	MS 3106-24-11S	3000±100	118±4	3100±100	122±0.4
2	ASD-CAPW3305	MS 3106-24-11S	5000±100	197±4	5100±100	201±0.4


## ● Encoder Connectors

ASD-ABEN0000

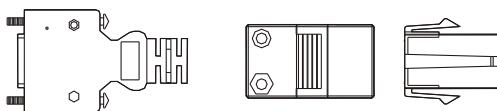

	Title	Part No.	Manufacturer
MOTOR SIDE	Housing	AMP(1-172161-9)	AMP
	Terminal	AMP(170359-3)	AMP
	CLAMP	DELTA(34703237XX)	DELTA
DRIVE SIDE	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M


ASD-CAEN1000

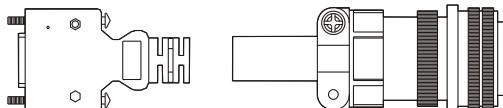

	Title	Part No.	Manufacturer
MOTOR SIDE	3106A-20-29S	-----	-----
DRIVE SIDE	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M

## ● Incremental Encoder Cables


ASD-ABEN0003, ASD-ABEN0005



	Title	Part No.	Manufacturer
MOTOR SIDE	Housing	AMP(1-172161-9)	AMP
	Terminal	AMP(170359-3)	AMP
	CLAMP	DELTA(34703237XX)	DELTA
DRIVE SIDE	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M

Item	Part No.	L	
		mm	inch
1	ASD-ABEN0003	3000±100	118±4
2	ASD-ABEN0005	5000±100	197±4

ASD-CAEN1003, ASD-CAEN1005

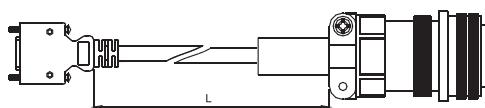


	Title	Part No.	Manufacturer
MOTOR SIDE	3106A-20-29S	-----	-----
	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M

Item	Part No.	Straight	
		mm	inch
1	ASD-CAEN1003	3106A-20-29S	3000±100 118±4
2	ASD-CAEN1005	3106A-20-29S	5000±100 197±4


# Optional Cables and Connectors

## ● Absolute Encoder Cables

ASD-A2EB0003, ASD-A2EB0005

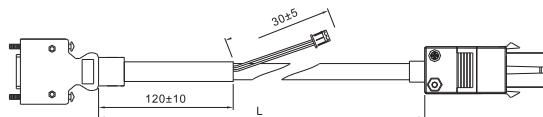

ASD-A2EB1003, ASD-A2EB1005

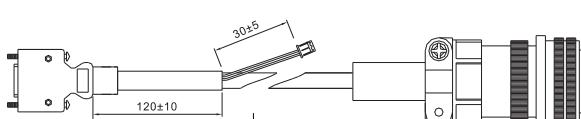


Title		Part No.	Manufacturer
MOTOR SIDE	Housing	AMP(1-172161-9)	AMP
	Terminal	AMP(170359-3)	AMP
	CLAMP	DELTA(34703237XX)	DELTA
DRIVE SIDE	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M
Item	Part No.	L mm	L inch
1	ASD-A2EB0003	3000±100	118±4
2	ASD-A2EB0005	5000±100	197±4

Title		Part No.	Manufacturer
MOTOR SIDE		3106A-20-29S	-
	PLUG	3M 10120-3000PE	3M
	SHELL	3M 10320-52A0-008	3M
Item	Part No.	L mm	L inch
1	ASD-A2EB1003	3000±100	118±4
2	ASD-A2EB1005	5000±100	197±4

## ● Battery Box For An Absolute Encoder

Single Battery Box



ASD-MDBT0100

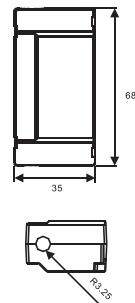

單位 : mm

Dual Battery Box

ASD-MDBT0200



Battery


ASD-CLBT0100



單位 : mm

## ● I/O Signal Connector (CN1)


ASD-CNSC0050



Vendor Name	Vendor P/N
3M TAIWAN LTD	10150-3000PE
3M TAIWAN LTD	10350-52A0-008


## ● RS-485 Connector

ASD-CNIE0B06

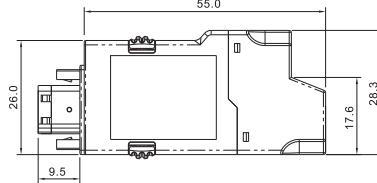

## ● Terminal Block Module

ASD-BM-50A

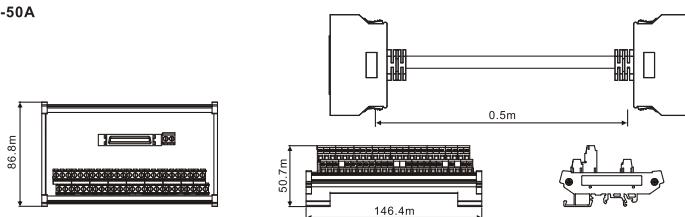

## ● RS-232 Communication Cable


ASD-CARS0003



Item	Part No.	mm	inch
1	ASD-CARS0003	3000±100	118±4

## ● Communication Cable between Drive and Computer (for PC)


DOP-CAUSBAB

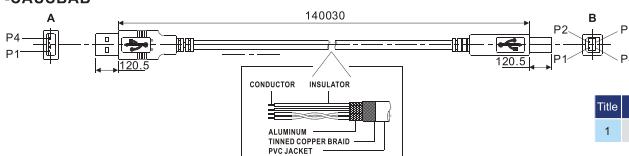

Item	Part No.	mm	inch
1	DOP-CAUSBAB	1400±30	55±1.2

## ● CANopen Communication Cable


TAP-CB03, TAP-CB04



Item	Part No.	mm	inch
1	TAP-CB03	500±10	19±0.4
2	TAP-CB04	1000±10	39±0.4

## ● CANopen Distribution Box

TAP-CN03

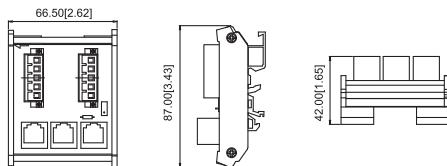

### NOTE

- 1) Other accessories for ASDA-A2 series will be increased gradually.
- 2) Accessories images shown here may differ from actual product appearance. Please refer to the actual product appearance.

# Servo Drive, Servo Motor and Accessories Combinations

## 220V Series

### 100W Servo Drive and 100W Low Inertia Servo Motor

Servo Drive	ASD-A2-0121-□
Low Inertia Servo Motor	ECMA-C10401□S
Power-Cables(Without Brake)	ASD-ABPW000X
Power Connectors (Without Brake)	ASDBCAPW0000
Power-Cables(With Brake)	ASD-ABPW010X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASD-ABEN000X
Absolute Encoder Cables	ASD-A2EB000X
Encoder Connectors	ASD-ABEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 200W Servo Drive and 200W Low Inertia Servo Motor

Servo Drive	ASD-A2-0221-□
Low Inertia Servo Motor	ECMA-C10602□S
Power-Cables(Without Brake)	ASD-ABPW000X
Power Connectors (Without Brake)	ASDBCAPW0000
Power-Cables(With Brake)	ASD-ABPW010X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASD-ABEN000X
Absolute Encoder Cables	ASD-A2EB000X
Encoder Connectors	ASD-ABEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 400W Servo Drive and 400W Low Inertia Servo Motor

Servo Drive	ASD-A2-0421-□
Low Inertia Servo Motor	ECMA-C10604□S ECMA-C10804□7
Power-Cables(Without Brake)	ASD-ABPW000X
Power Connectors (Without Brake)	ASDBCAPW0000
Power-Cables(With Brake)	ASD-ABPW010X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASD-ABEN000X
Absolute Encoder Cables	ASD-A2EB000X
Encoder Connectors	ASD-ABEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

## 400W Servo Drive and 500W Medium Inertia Servo Motor

Servo Drive	ASD-A2-0421-□
Medium Inertia Servo Motor	ECMA-E11305-□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

## 400W Servo Drive and 300W High Inertia Servo Motor

Servo Drive	ASD-A2-0421-□
High Inertia Servo Motor	ECMA-G11303-□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

## 750W Servo Drive and 750W Low Inertia Servo Motor

Servo Drive	ASD-A2-0721-□
Low Inertia Servo Motor	ECMA-C10807-□S ECMA-C10907-□S
Power-Cables(Without Brake)	ASD-ABPW000X
Power Connectors (Without Brake)	ASDBCAPW0000
Power-Cables(With Brake)	ASD-ABPW010X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASD-ABEN000X
Absolute Encoder Cables	ASD-A2EB000X
Encoder Connectors	ASD-ABEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

# Servo Drive, Servo Motor and Accessories Combinations

## 220V Series

### 750W Servo Drive and 600W High Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-0721-□
<b>High Inertia Servo Motor</b>	ECMA-G11306□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 1kW Servo Drive and 1kW Low Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-1021-□
<b>Low Inertia Servo Motor</b>	ECMA-C11010□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 1kW Servo Drive and 1kW Medium Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-1021-□
<b>Medium Inertia Servo Motor</b>	ECMA-E11310□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 1kW Servo Drive and 900W High Inertia Servo Motor

Servo Drive	ASD-A2-1021-□
High Inertia Servo Motor	ECMA-G11309□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 1.5kW Servo Drive and 1.5kW Medium Inertia Servo Motor

Servo Drive	ASD-A2-1521-□
Medium Inertia Servo Motor	ECMA-G11315□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 2kW Servo Drive and 2kW Low Inertia Servo Motor

Servo Drive	ASD-A2-2023-□
Low Inertia Servo Motor	ECMA-C11020□S
Power Cables(Without Brake)	ASD-A2PW100X
Power Cables(With Brake)	ASD-A2PW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

# Servo Drive, Servo Motor and Accessories Combinations

## 220V Series

### 2kW Servo Drive and 2kW Medium Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-2023-□
<b>Medium Inertia Servo Motor</b>	ECMA-E11320□S
Power-Cables(Without Brake)	ASD-A2PW100X
Power-Cables(With Brake)	ASD-A2PW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 2kW Servo Drive and 2kW Medium Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-2023-□
<b>Medium Inertia Servo Motor</b>	ECMA-E11820□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW210X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 3kW Servo Drive and 3kW Medium Inertia Servo Motor

<b>Servo Drive</b>	ASD-A2-3023-□
<b>Medium Inertia Servo Motor</b>	ECMA-E11830□S
Power-Cables(Without Brake)	ASD-CAPW200X
Power-Cables(With Brake)	ASD-CAPW210X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 3kW Servo Drive and 3kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-3023-□
Medium-High Inertia Servo Motor	ECMA-F11830-□S
Power-Cables(Without Brake)	ASD-CAPW200X
Power-Cables(With Brake)	ASD-CAPW210X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 4.5kW Servo Drive and 4.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-4523-□
Medium-High Inertia Servo Motor	ECMA-F11845-□S
Power-Cables(Without Brake)	ASD-CAPW320X
Power-Cables(With Brake)	ASD-CAPW330X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 5.5kW Servo Drive and 5.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-5523-□
Medium-High Inertia Servo Motor	ECMA-F11855-□S
Power-Cables(Without Brake)	-
Power-Cables(With Brake)	-
Power Connectors	ASD-CAPW4000
Brake Cables	ASD-CNBR1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

# Servo Drive, Servo Motor and Accessories Combinations

## 220V Series

### 7.5kW Servo Drive and 7.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-7523-□
Medium-High Inertia Servo Motor	ECMA-F11875□S
Power-Cables(Without Brake)	-
Power-Cables(With Brake)	-
Power Connectors	ASD-CAPW4000
Brake Cables	ASD-CNBR1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

11kW and 15kW models will be available soon For the available models and related optional accessories, please visit our website at : [www.delta.com.tw/ia](http://www.delta.com.tw/ia) , or please consult our local distributors.

## 400V Series

### 750W Servo Drive and 750W Low Inertia Servo Motor

Servo Drive	ASD-A2-0743-□
Low Inertia Servo Motor	ECMA-J10807□S
Power-Cables(Without Brake)	ASD-A2PW200X
Power Connectors (Without Brake)	ASDBCAPW0000
Power-Cables(With Brake)	ASD-ABPW010X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASD-ABEN000X
Absolute Encoder Cables	ASD-A2EB000X
Encoder Connectors	ASD-ABEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 1kW Servo Drive and 1kW Medium Inertia Servo Motor

Servo Drive	ASD-A2-1043-□
Medium Inertia Servo Motor	ECMA-K11310□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

## 400V Series

### 1.5kW Servo Drive and 1.5kW Medium Inertia Servo Motor

Servo Drive	ASD-A2-1543-□
Medium Inertia Servo Motor	ECMA-K11315□S
Power-Cables(Without Brake)	ASD-CAPW100X
Power-Cables(With Brake)	ASD-CAPW110X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 2kW Servo Drive and 2kW Medium Inertia Servo Motor

Servo Drive	ASD-A2-2043-□
Medium Inertia Servo Motor	ECMA-K11320□S
Power-Cables(Without Brake)	ASD-CAPW120X
Power-Cables(With Brake)	ASD-CAPW130X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 3kW Servo Drive and 3kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-3043-□
Medium-High Inertia Servo Motor	ECMA-K11830□S
Power-Cables(Without Brake)	ASD-CAPW220X
Power-Cables(With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

# Servo Drive, Servo Motor and Accessories Combinations

## 400V Series

### 4.5kW Servo Drive and 4.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-4543-□
Medium-High Inertia Servo Motor	ECMA-L11845□S
Power-Cables(Without Brake)	ASD-CAPW220X
Power-Cables(With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 5.5kW Servo Drive and 5.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-5543-□
Medium-High Inertia Servo Motor	ECMA-L11855□3
Power-Cables(Without Brake)	ASD-CAPW220X
Power-Cables(With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

### 7.5kW Servo Drive and 7.5kW Medium-High Inertia Servo Motor

Servo Drive	ASD-A2-7543-□
Medium-High Inertia Servo Motor	ECMA-L11875□3
Power-Cables(Without Brake)	ASD-CAPW320X
Power-Cables(With Brake)	ASD-CAPW330X
Power Connectors	ASD-CAPW2000
Incremental Encoder Cables	ASD-CAEN100X
Absolute Encoder Cables	ASD-A2EB100X
Encoder Connectors	ASD-CAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

11kW and 15kW models will be available soon For the available models and related optional accessories, please visit our website at : [www.delta.com.tw/ia](http://www.delta.com.tw/ia) , or please consult our local distributors.

Other Accessories (for ASDA-A2 series all models)	
Description	Delta Part Number
50Pin I/O signal connector (CN1)	ASD-CNSC0050
Terminal Block Module	ASD-BM-50A
RS-232 Communication Cable	ASD-CARS0003
Communication Cable between Drive and Computer(for PC)	DOP-CAUSBAB
CANopen Communication Cable	TAP-CB03 / TAP-CB04
CANopen Distribution Box	TAP-CN03
RS-485 Connector	ASD-CNIE0B06
Regenerative Resistor 400W 40Ω	BR400W040
Regenerative Resistor 1kW 20Ω	BR1K0W020
Regenerative Resistor 3kW 10Ω	BR1K5W005



## Safety Information

<b>Global Standards</b>	ASDA-A2 series is designed to fully comply with demanding international standards, i.e. IEC and EN, etc. for all fields of industrial automation technology.	
<b>EMC standard</b>	EN61000-4-6	Level 3
	EN61000-4-3	Level 3
	EN61000-4-2	Level 2 and Level 3
	EN61000-4-4	Level 3
	EN61000-4-8	Level 4
	EN61000-4-5	Level 3
<b>Conducted &amp; Radiated Emissions</b>	Complies with EN550011 Class A Group 1, with external EMC filter	
<b>CE Marking</b>	CE recognized. Complies with Directive 2006/95/EC of the European Parliament and EMC Directive 2004/108/EC.	
<b>UL Approval</b>	UL (U.S.), cUL (Canada) recognized.	
<b>Test Standard</b>	IEC/EN50178, IEC/EN60529	
	IP20	
<b>Vibration</b>	1G less than 20Hz, 0.6G 20 to 50Hz. Complies with IEC/EN50178	
<b>Shock</b>	15gn 11ms. Complies with IEC/EN600028-2-27	
<b>Pollution Degree</b>	Degree 2. Complies with IEC/EN61800-5-1	



# Regenerative Resistor Specifications

## 220V Series

Servo Drive (kW)	Specifications of Built-in Regenerative Resistors		Min. Allowable Resistance (Ohm)
	Resistance (parameter P1-52) (Ohm)	Capacity (parameter P1-53) (Watt)	
0.1	-	-	30Ω
0.2	-	-	30Ω
0.4	40Ω	40W	30Ω
0.75	40Ω	60W	20Ω
1.0	40Ω	60W	20Ω
1.5	40Ω	60W	20Ω
2.0	20Ω	100W	10Ω
3.0	20Ω	100W	10Ω
4.5	20Ω	100W	10Ω
5.5	-	-	8Ω
7.5	-	-	5Ω
11	-	-	5Ω
15	-	-	3Ω

**Note:**

- 400W ~ 4.5kW servo drives provide a built-in regenerative resistor.
- When the fault, ALE05 (Regeneration Error) occurs, please increase the regenerative resistor capacity or decrease the regenerative resistor resistance (the regenerative resistor resistance should not be less than the minimum allowable resistance listed in the above table.)
- If the situation is not improved after increasing the regenerative resistor capacity or decreasing the regenerative resistor resistance, please purchase regenerative resistor module.
- When combining multiple small-capacity regenerative resistors in parallel to increase the regenerative resistor capacity, make sure that the total resistance value of the regenerative resistors should not be less than the minimum allowable resistance listed in the above table.

## 400V Series

Servo Drive (kW)	Specifications of Built-in Regenerative Resistors		Min. Allowable Resistance (Ohm)
	Resistance (parameter P1-52) (Ohm)	Capacity (parameter P1-53) (Watt)	
0.75	80Ω	100W	60Ω
1.0	80Ω	100W	60Ω
1.5	80Ω	100W	40Ω
2.0	-	-	40Ω
3.0	-	-	30Ω
4.5	-	-	20Ω
5.5	-	-	20Ω
7.5	-	-	15Ω
11	-	-	15Ω
15	-	-	10Ω

**Note:**

- 750W ~ 1.5kW servo drives provide a built-in regenerative resistor.
- When the fault, ALE05 (Regeneration Error) occurs, please increase the regenerative resistor capacity or decrease the regenerative resistor resistance (the regenerative resistor resistance should not be less than the minimum allowable resistance listed in the above table.)
- If the situation is not improved after increasing the regenerative resistor capacity or decreasing the regenerative resistor resistance, please purchase regenerative resistor module.
- When combining multiple small-capacity regenerative resistors in parallel to increase the regenerative resistor capacity, make sure that the total resistance value of the regenerative resistors should not be less than the minimum allowable resistance listed in the above table.



## IABU Headquarters

**Delta Electronics, Inc.**

Taoyuan Technology Center  
No. 18, Xinglong Rd., Taoyuan City,  
Taoyuan County 33068, Taiwan  
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

## Asia

**Delta Electronics (Jiangsu) Ltd.**

Wujiang Plant 3  
1688 Jiangxing East Road,  
Wujiang Economic Development Zone  
Wujiang City, Jiang Su Province,  
People's Republic of China (Post code: 215200)  
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

**Delta Greentech (China) Co., Ltd.**

238 Min-Xia Road, Pudong District,  
ShangHai, P.R.C.  
Post code : 201209  
TEL: 86-21-58635678 / FAX: 86-21-58630003

**Delta Electronics (Japan), Inc.**

Tokyo Office  
2-1-14 Minato-ku Shibadaimon,  
Tokyo 105-0012, Japan  
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

**Delta Electronics (Korea), Inc.**

1511, Byucksan Digital Valley 6-cha, Gasan-dong,  
Geumcheon-gu, Seoul, Korea, 153-704  
TEL: 82-2-515-5303 / FAX: 82-2-515-5302

**Delta Electronics Int'l (S) Pte Ltd**

4 Kaki Bukit Ave 1, #05-05, Singapore 417939  
TEL: 65-6747-5155 / FAX: 65-6744-9228

**Delta Electronics (India) Pvt. Ltd.**

Plot No 43 Sector 35, HSIIDC  
Gurgaon, PIN 122001, Haryana, India  
TEL : 91-124-4874900 / FAX : 91-124-4874945

## Americas

**Delta Products Corporation (USA)**

Raleigh Office  
P.O. Box 12173, 5101 Davis Drive,  
Research Triangle Park, NC 27709, U.S.A.  
TEL: 1-919-767-3800 / FAX: 1-919-767-8080

**Delta Greentech (Brasil) S.A**

Sao Paulo Office  
Rua Itapeva, 26 - 3º andar Edificio Itapeva One-Bela Vista  
01332-000-São Paulo-SP-Brazil  
TEL: +55 11 3568-3855 / FAX: +55 11 3568-3865

## Europe

**Deltronics (The Netherlands) B.V.**

Eindhoven Office  
De Witbotgat 15, 5652 AG Eindhoven, The Netherlands  
TEL: 31-40-2592850 / FAX: 31-40-2592851

\*We reserve the right to change the information in this catalogue without prior notice.